


* ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~1.8GHz
 - 2-1. BAND 3 : 1.8GHz
 - 2-2. BAND 8 : 900MHz
 - 2-3. BAND 28 : 700MHz
3. VSWR (Max) : 1.2

*Compliance with standard IP67

REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
1	Initial Registration	IR	S.Y.EUN	I.C.KIM	2020. 04. 21.

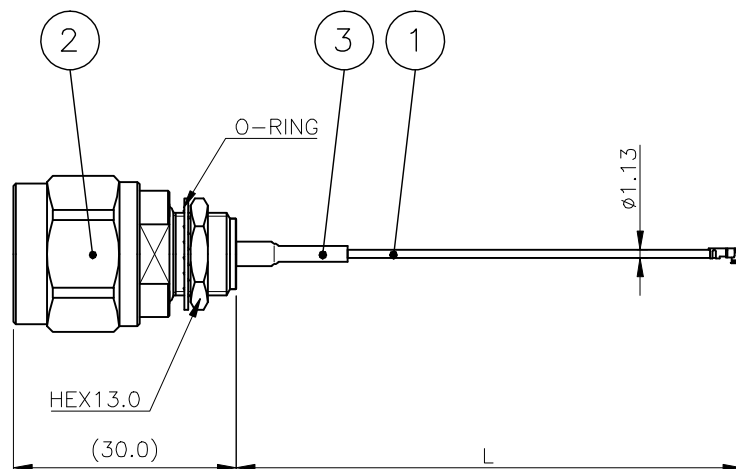


Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. N PB (R/N)-----> BODY : 이원합금(Ni/Tin) Plating
 CONTACT : Gold Plating
 CAP : Nickel Plating이원합금(Ni/Tin) Plating

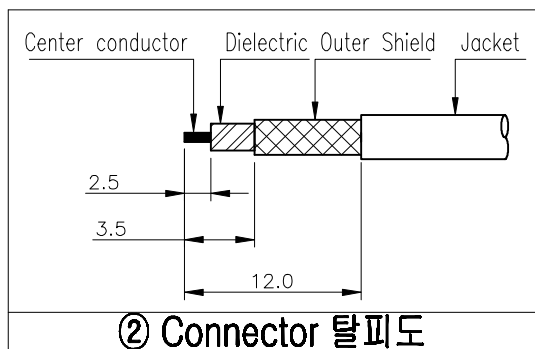

3	BONDING TUBE	1	LS TUBE	ATU00003-N/1	Ø3-15mm BLACK
2	CONNECTOR	1	KJ COMTECH	CN03925-7/1	N50 PB (R/N)
1	COAXIAL CABLE		I-PEX	ACA00194-N/4	MHF1-Ø1.13 (GRAY)

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	REMARKS
	DATE	2020. 04. 21.				
	CUSTOMER CODE	APPROVED BY	I.C.KIM			
	CABLE LENGTH TOLERANCE	CHECKED BY				
		DRAWN BY	S.Y.EUN			
		CHECKED BY				
		SCALE	UNIT	TITLE		
		1/1	mm	RF CABLE		
				DWG NO.	CF01492-7/1	
				DETAIL NO.		
				REVISION	IR	SHEET 1 of 1