


* ELECTRICAL DATA : → 측정 후 SPEC 기재 예정

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) :
4. Insertion Loss (Min) :


REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2020. 04. 27.

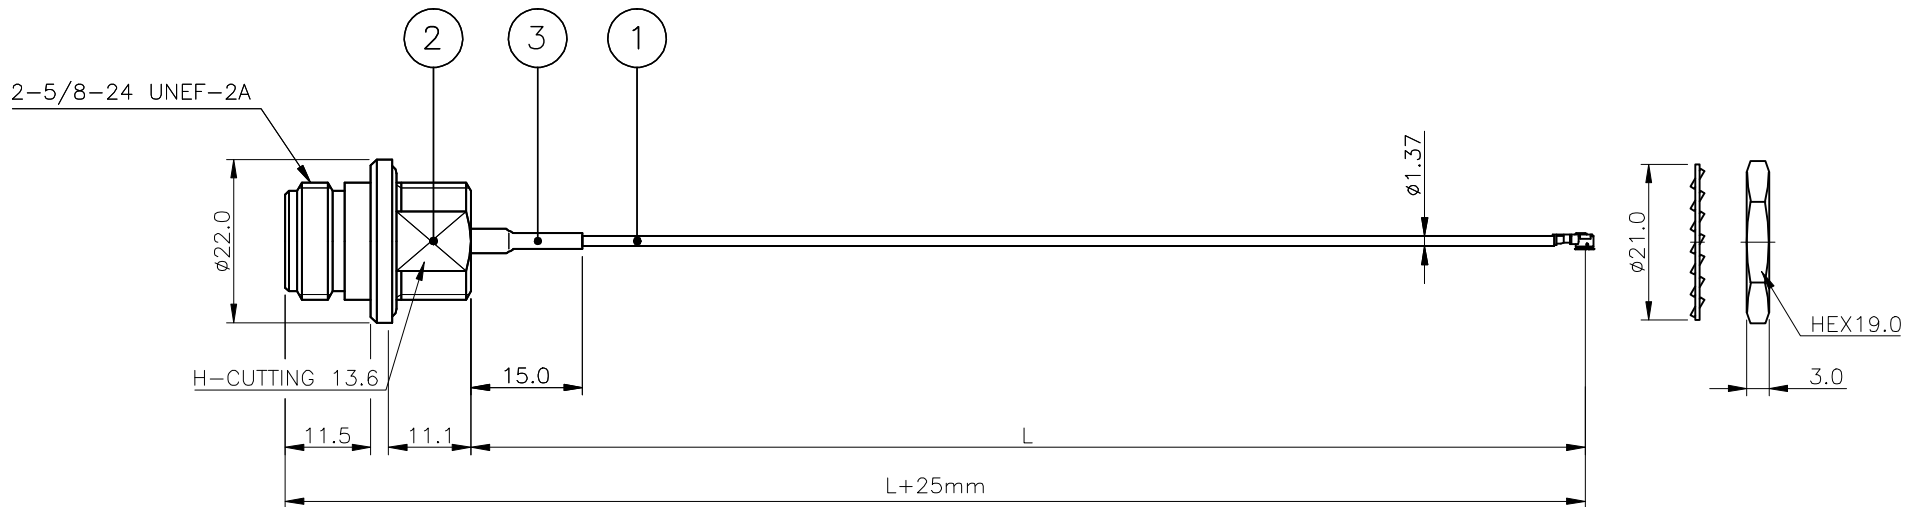

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N JB (R/N)-----▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
NUT/WASHER : Nickel Plating

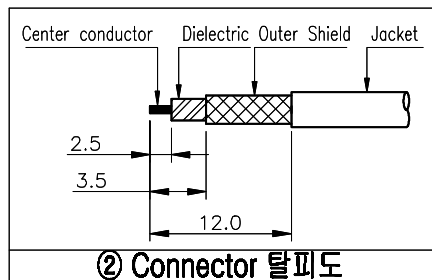

3	BONDING TUBE	1	LS TUBE	ATU00003-N/1	Ø3-15mm BLACK
2	CONNECTOR	1	KJ COMTECH	CN03928-7/1	N50 JB (R/N)
1	COAXIAL CABLE		I-PEX	ACA00464-N/2	MHF1-Ø1.37 (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS	
	DATE 2020. 04. 27.			 RF & MICROWAVE TECHNOLOGY TEL : 02-92-042-0015 Fax : 02-92-042-0017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
	CHECKED BY			TITLE RF CABLE			
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01495-7/1	
	SCALE 1/1	UNIT mm			DETAIL NO.		
						REVISION	1 R