


REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2020. 05. 06.





※ 4.3/10 CONNECTOR 모두 PIPE 압착하지 않고 끼운 상태에서 BONDING TUBE 수축 할 것.

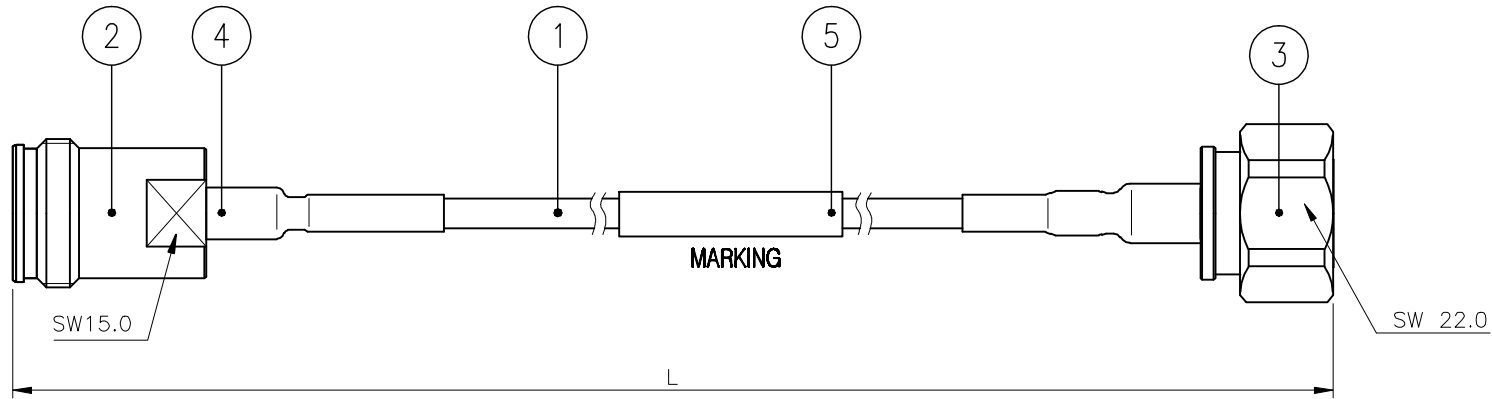

※ 4.3/10 CONNECTOR ASSY 작업 시 실드 10mm구간까지 다평하여 작업할 것.



MARKING

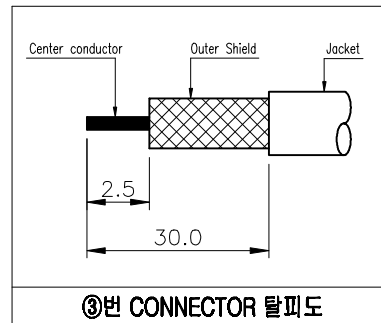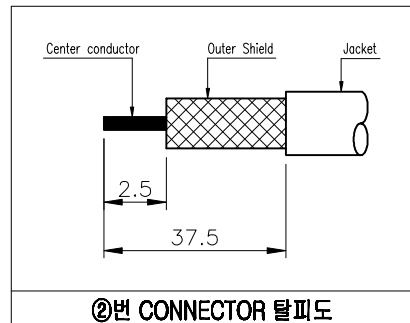

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 4.3/10 JS----▶ BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
 - 4.3/10 PS--▶ BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating

ELECTRICAL DATA :

- IMPEDANCE : 50ohm
- FREQUENCY RANGE : DC~6GHz
- VSWR (Max) : 1.2
- INSERTION LOSS (Min) : -1.5dB
- PIMD SPEC : 150dBc (Min) (20W*2Tone)

5	MARKING TUBE	1	LS TUBE	ATU00216-N/1	ø6-30mm (White)
4	BONDING TUBE	2	LS TUBE	ATU00008-N/1	ø6-45mm (Black)
3	CONNECTOR	1	KJ COMTECH	CN03608-7/B	4.3-10 DIN50 PS (SCREW)
2	CONNECTOR	1	KJ COMTECH	CN03638-7/4	4.3-10 DIN50 JS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω) BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2020. 05. 06.				
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
	DRAWN BY	S.Y.EUN				
	CHECKED BY					
CABLE LENGTH TOLERANCE	SCALE	N/S	UNIT	mm		
0 ~ 1000mm : +5, -0						
1000 ~ 2000mm : +10, -0						
2000 ~ 3000mm : +15, -0						
3000 ~ 4000mm : +20, -0						
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%						



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017

TITLE CABLE ASS'Y

DWG NO. CF01497-7/1

DETAIL NO.

REVISION I R SHEET 1 of 1