


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024. 08. 08.

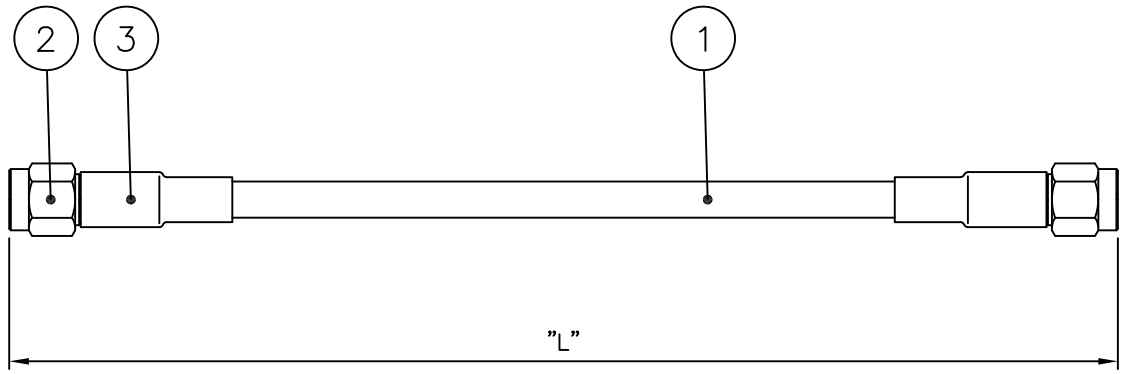


ELECTRICAL DATA

- 1. IMPEDANCE : 50ohm
- 2. Frequency Range : DC~18GHz
- 3. VSWR(Max) : 1.25

※작업 시 주의사항

디핑작업시 JACKET 달지 않게 작업 주의 (변형발생)
HEX5.7 압착시 절반만 압착할 것

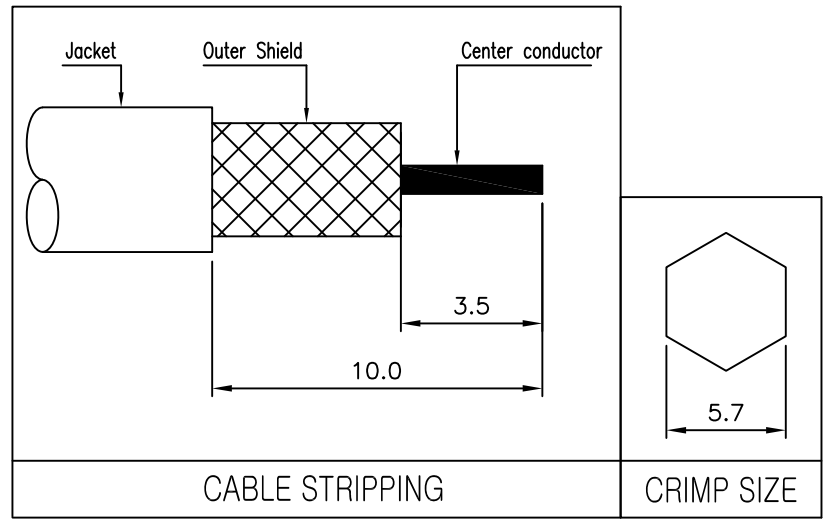

Notes

- 1. RoHS & Pb-FREE
- 2. CONNECTOR FINISHES
 - 2-1. SMA50 PS---▶▶BODY : Gold Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

3	SHRINK TUBE	2	LS TUBE	ATU00007-N/1	Ø8-20mm-BLACK
2	CONNECTOR	2	KJ COMTECH	CN02764-7/C	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00517-N/1	141MFU (BLUE/-URETHANE)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2024. 08. 08.		
CUSTOMER CODE			APPROVED BY		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			mm		
			A4		
			DWG NO.		
			CF01499-7/2		
			REVISION		
			I R		
			SHEET		
			1 of 1		



RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE CABLE ASS'Y