


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2020. 08. 13.


- * ELECTRICAL DATA :**
1. IMPEDANCE : 50Ω
 2. FREQUENCY RANGE : DC~1.8GHz
 - 2-1. BAND 3 : 1.8GHz
 - 2-2. BAND 8 : 900MHz
 - 2-3. BAND 28 : 700MHz
 3. VSWR (Max) : 1.2
- *Compliance with standard IP67**

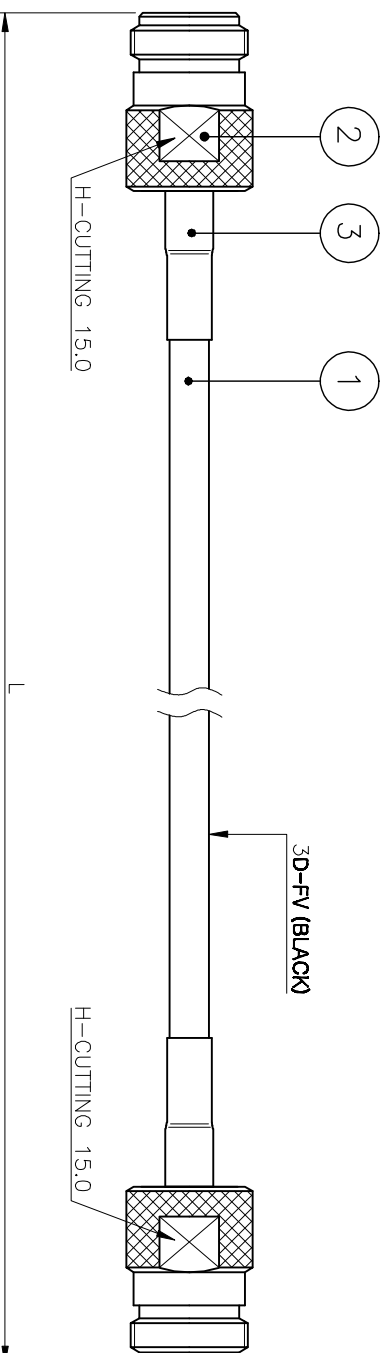

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N JS →▷ BODY : Binary alloy(SU)
 - CONTACT : Gold Plating

※ 작업 시 수축튜브 위치 주의
※ 알루미늄 Tape 바디위로 올려서 작업할 것

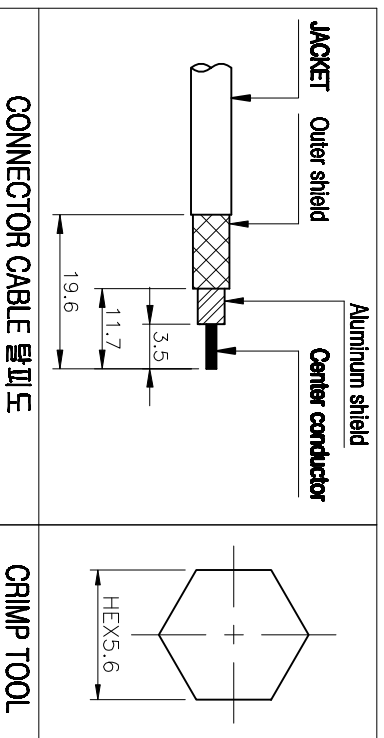

CUSTOMER	3	SHRINK TUBE	2	LS TUBE	AT100060-N/1	ø6-20mm (BLACK)			
	2	CONNECTOR	2	KJ COMTECH	CN03943-7/1	N50 JS			
	1	COAXIAL CABLE		누리텔	ACA00468-N/2	3D-FV (BLACK)			
	NO.	DESCRIPTION	QTY	VENDOR	PART NO.	REMARKS			
CUSTOMER CODE	DATE		2020. 08. 13.						
	APPROVED BY		I.C.KIM						
	CHECKED BY								
CABLE LENGTH TOLERANCE	DRAWN BY		S.Y.EUN						
	CHECKED BY								
	SCALE	UNIT						A4	
	N/S	mm							
0 ~ 100mm : +5, -0 100 ~ 200mm : +10, -0 200 ~ 300mm : +15, -0 300 ~ 400mm : +20, -0 400 ~ 500mm : +25, -0 500 ~ : +10%		TITLE							
		CABLE ASS'Y							
		DWG NO. CF01516-7/1							
		DETAIL NO.							
		REVISION 1 R SHEET 1 of 1							
		KJ COMTECH CO., LTD.							
		RE A JOURNOME TECHNOLOGY TEL : 02-45-45-0915 FAX : 02-45-45-0917							