


ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : 1.5GHz~1.6GHz
3. VSWR (Max) : 1.2


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020. 04. 16.
1	PIPE 압착 시 자켓 과도한 눌림으로 케이블 심선 끊어지는 현상 방지로 인한 Crimp Tool 사이즈 재변경	S.Y.EUN	I.C.KIM	2021. 05. 12.

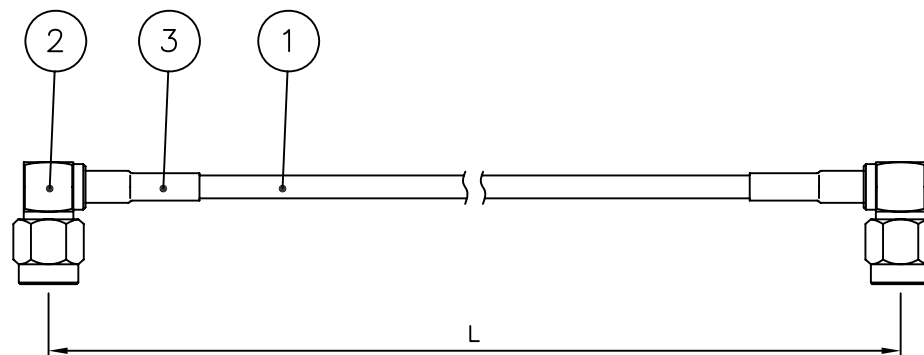

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PL-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Platingg

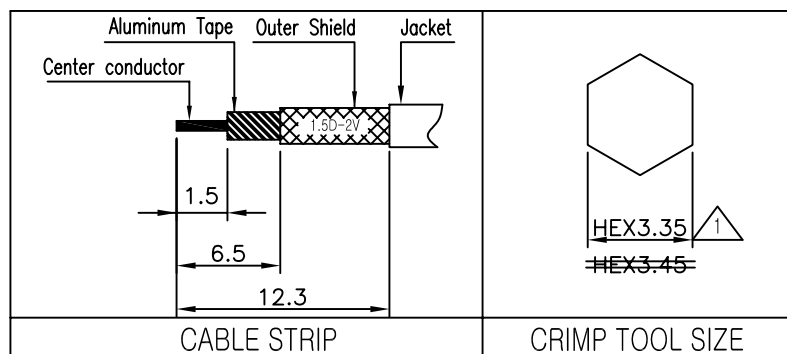

3	SHRINK TUBE	2	LS전선	ATU00056-N/1	ø4-20 (Black)
2	CONNECTOR	2	KJ COMTECH	CN00123-7/7	SMA50 PL
1	COAXIAL CABLE		누리텔	ACA00504-N/1	1.5D-2V(50Ω) BLACK
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE 2021. 05. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
APPROVED BY I.C.KIM					
CHECKED BY		TITLE CABLE ASS'Y			
DRAWN BY S.Y.EUN					
CHECKED BY		A4			
SCALE N/S					
UNIT mm					