


CF01519-7/1

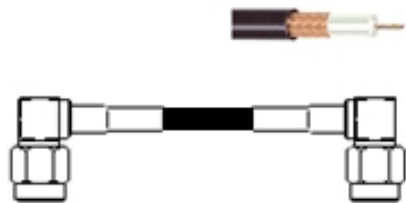

SMA-PL+SMA-PL

+1.5D-2V(BLACK/누리텔)

SMA PL RG316DS Crimp

BO/Go PI/Go CAP/BR/NI

CF01519-7/1 0.3M

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

0.3M - S11/S22/S21 (SWR, SWR, dB)

■ 1.0GHz	- 1.01, 1.01, 0.33
■ 2.0GHz	- 1.02, 1.03, 0.54
■ 3.0GHz	- 1.05, 1.07, 0.69
■ 4.0GHz	- 1.10, 1.13, 0.80
■ 5.0GHz	- 1.17, 1.16, 0.94

■ 6.0GHz	- 1.22, 1.18, 0.99
■ 7.0GHz	- 1.17, 1.19, 1.14
■ 8.0GHz	- 1.20, 1.17, 1.20

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00006-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

