



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.09.03.

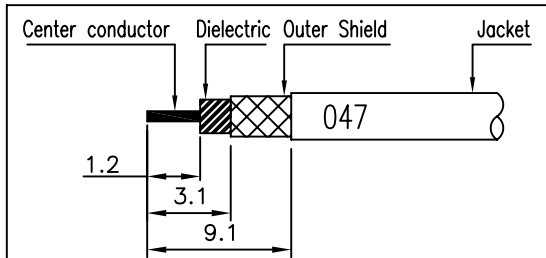

②번 CONNECTOR 탈피도

* 핀 납땜 시 납량 적게 작업할 것

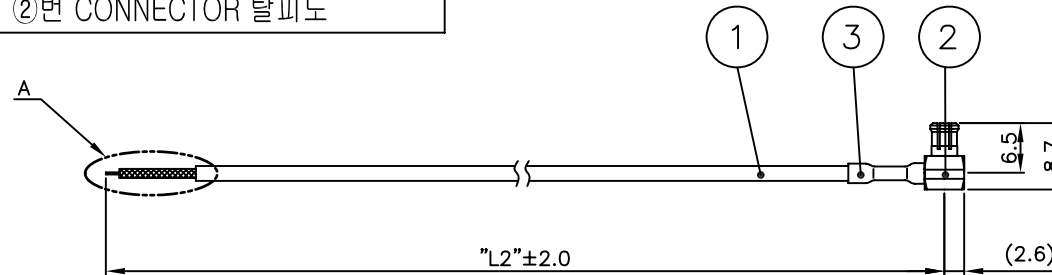

★ 양단 작업하여 특성 확인후 절단할 것



* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω
Frequency Range : 3.4GHz~3.9GHz
V.S.W.R (Max.) : 1.2

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. MCX50-PL ----> BODY : Gold Plating
CONTACT : Gold Plating
COVER : Gold Plating
JACK : Gold Plating
- 미기재된 관리공차 : ±0.5mm

* 케이블 작업 후 아래와 같이 밴딩작업 할 것. (7.5mm 맞출 것)

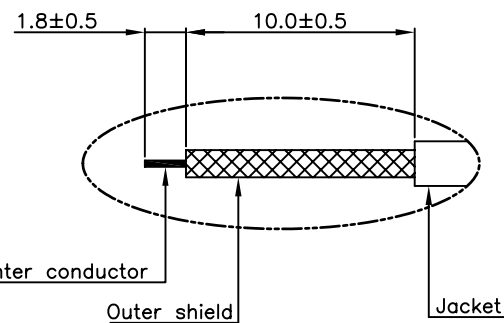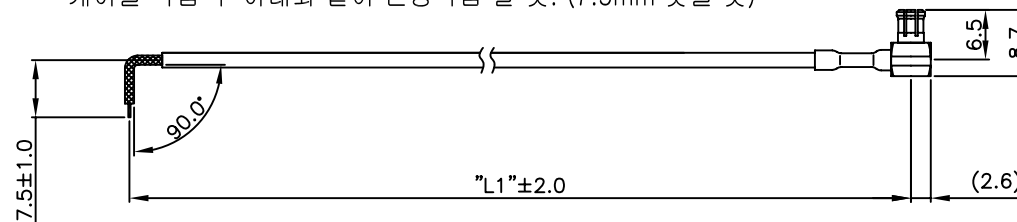

Detail "A"

3	SHRINK TUBE	1	미래KDK	ATU00396-N/1	∅3x10 Black (할로겐프리)
2	CONNECTOR	1	KJ COMTECH	CN03871-7/2	MCX50 PL
1	COAXIAL CABLE		COAX-PARK	ACA00114-N/3	47FJ(50Ω) BLUE (JACKET 재질:FEP)

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
		DATE		2020. 09. 03.			
CUSTOMER CODE		APPROVED BY		I.C.KIM			
		CHECKED BY					
		DRAWN BY		S.Y.EUN			
		CHECKED BY					
CABLE LENGTH TOLERANCE		SCALE		UNIT		TITLE	
0 ~ 1000mm : +5, -0		N/S		mm		CABLE ASS'Y	
1000 ~ 2000mm : +10, -0							
2000 ~ 3000mm : +15, -0							
3000 ~ 4000mm : +20, -0							
4000 ~ 5000mm : +25, -0							
5000 ~ : +10%							