


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~1GHz
3. VSWR : 1.2(Max)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.12.09.

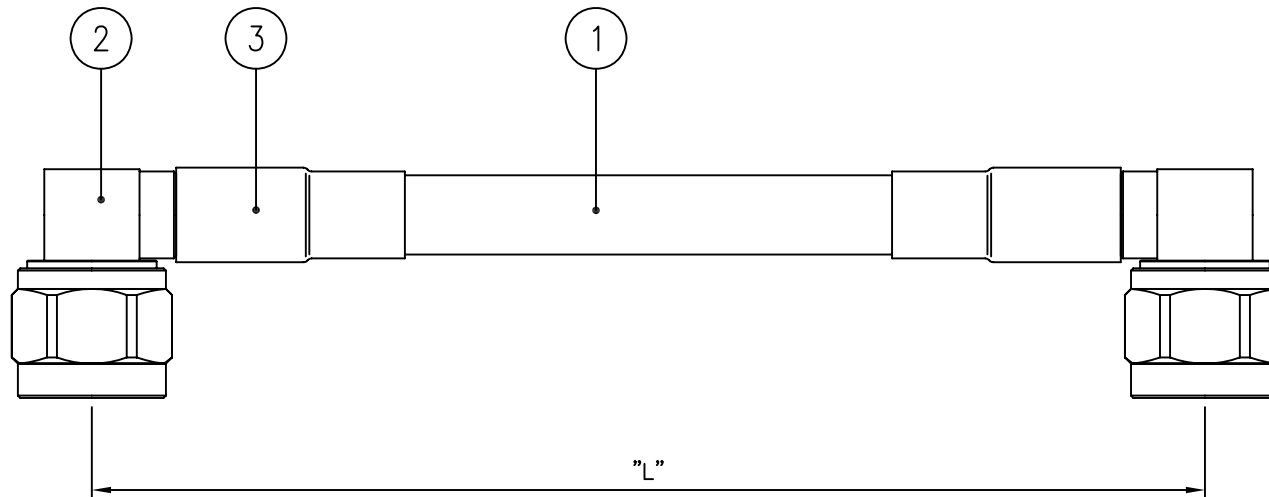

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. N PL---▶▶BODY : Nickel Plating
CONTACT : Gold Plating
COUPLING CAP : Nickel Plating

3	SHRINK TUBE	2	LS TUBE	ATU00072-N/1	ø12x30_Black
2	CONNECTOR	2	KJ COMTECH	CN00776-7/2	N50 PL
1	COAXIAL CABLE		TIMES	ACA00395-N/1	LMR400-UF(50Ω)_Black
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2020. 12. 09.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY S.Y.EUN		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT mm		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			TITLE		
			CABLE ASSEMBLY		
			DWG NO. CF01530-7/1		
			DETAIL NO.		
			REVISION I R SHEET 1 of 1		



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017