


CF01530-7/1

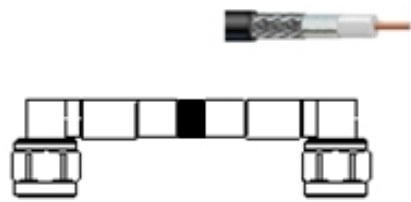

CF01530-7/1 3M

|                |                                                                      |
|----------------|----------------------------------------------------------------------|
| Frequency      |                                                                      |
| Insertion Loss |                                                                      |
| VSWR           |                                                                      |
| Impedance      | <input checked="" type="checkbox"/> 50Ω <input type="checkbox"/> 75Ω |
| Temperature    | -40°C ~ 125°C                                                        |

3M  
S11/S22/S21  
(SWR, SWR, dB)

|          |                    |
|----------|--------------------|
| ■_1,0GHz | - 1,03, 1,03, 0,55 |
| -----    |                    |
| ■_2,0GHz | - 1,25, 1,26, 0,94 |
| ■_3,0GHz | - 1,12, 1,12, 1,12 |
| ■_4,0GHz | -                  |
| ■_5,0GHz | -                  |
| ■_6,0GHz | -                  |
| ■_7,0GHz | -                  |
| ■_8,0GHz | -                  |

N-PL+N-PL  
+LMR400-UF  
N PL LMR400  
BO/NI, PI/GO, CH/BR/NI

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- E5071B (~8.5GHz)
- N Male to N Male
- N (J) N (J) AD00379-7/2
- ZVA50 (~50GHz)
- 10GHz Cable (CF00539-7/1)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

