



2-1. 4.3/10 DIN50 JB----▶▷BODY : SUCO 3 μ m Plating
CONTACT : Silver 5 μ m Plating

2-2. SMA50 PS-----▶▷BODY : SUCO Plating
CONTACT : Silver 3 μ m Plating
COUPLING CAP : SUCO Plating

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.03.05.

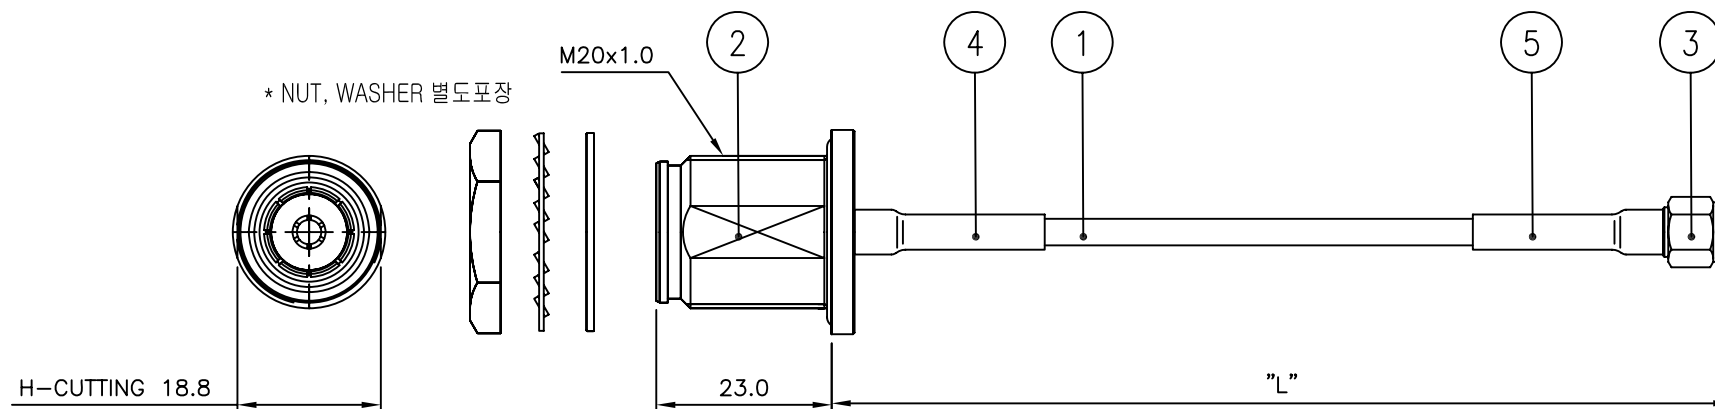

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3.8GHz
3. VSWR (Max) : 1.2

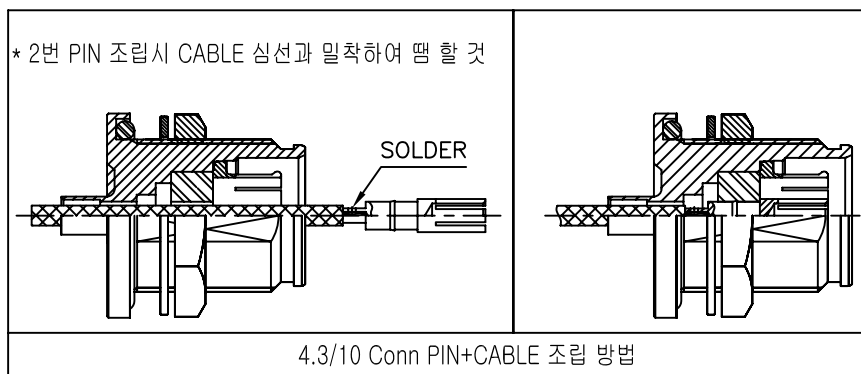

5	BONDING TUBE	1	LS TUBE	ATU00350-N/1	ø7-20mm (BLACK)
4	BONDING TUBE	1	LS TUBE	ATU00350-N/1	ø7-40mm (BLACK)
3	CONNECTOR	1	KJ COMTECH	CN02764-7/2	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN03638-7/2	4.3/10 DIN50 JB(F/N)
1	COAXIAL CABLE		EXPANTEL	ACA00040-N/2	141FJ-BLUE(50Ω) (FEP재질)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2021. 03. 05.			 COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					TITLE CABLE ASS'Y
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		A4			
	CHECKED BY						
	SCALE	UNIT			DWG NO.	CF01539-7/1	
	N/S	mm			DETAIL NO.		
				REVISION	I R	SHEET 1 of 1	