


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.04.22.
1	상대물 체결시 핀 회전으로 인해 심선 끊어짐 방지 핀 구조 변경	S.H.KIM		2024.01.19.
2	N-PS-4H 블랙니켈아연도금 적용 (CN02311-7/3->CN02311-7/4)	S.H.KIM		2024.05.08.




Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - N PS-4H--▶▷BODY : base_ni/black(zinc)
CONTACT : Gold Plating
CAP : base_ni/black(zinc)
 - SMA PS---▶▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

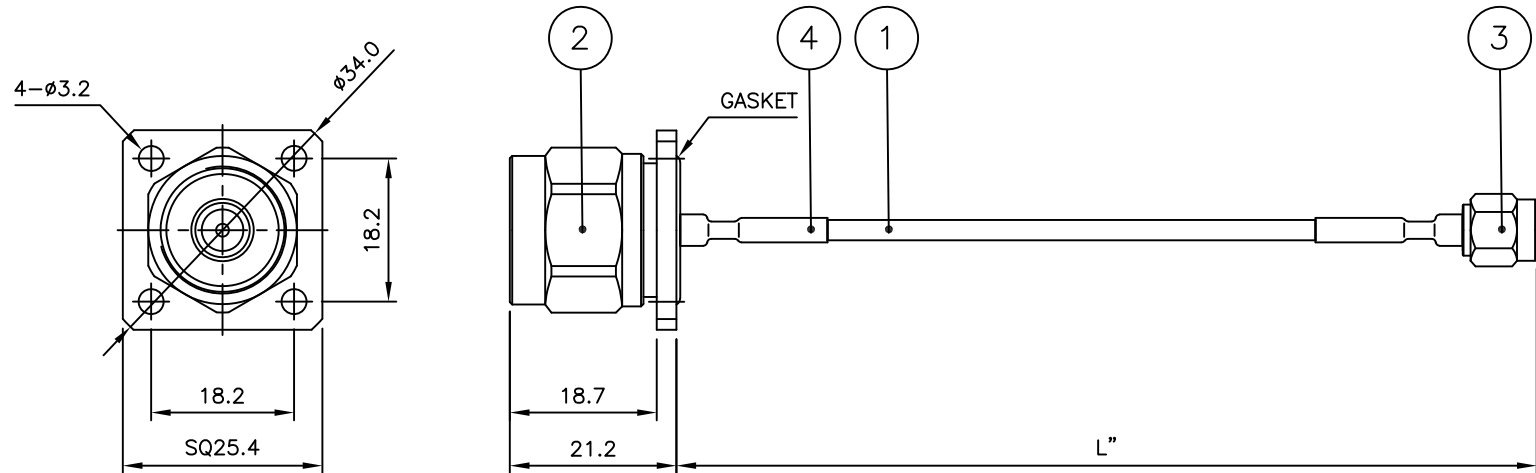

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4-20 Black
3	CONNECTOR	1	KJ COMTECH	CN02796-7/8	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN02311-7/4 CN02311-7/3	N50 PS-4H
1	COAXIAL CABLE		EXPANTEL	ACA00039-N/1	85FJ(50Ω) (BLUE-FEP)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2024. 05. 08.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY					
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.H.KIM		A4		
	CHECKED BY					
	SCALE N/S	UNIT mm				
					DWG NO.	CF01543-7/1
				DETAIL NO.		
				REVISION	2	SHEET 1 of 1