


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1GHz~3GHz
3. VSWR (Max) : 1.2
4. Insertion loss(Min) : -1.0dB

REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 03. 30.

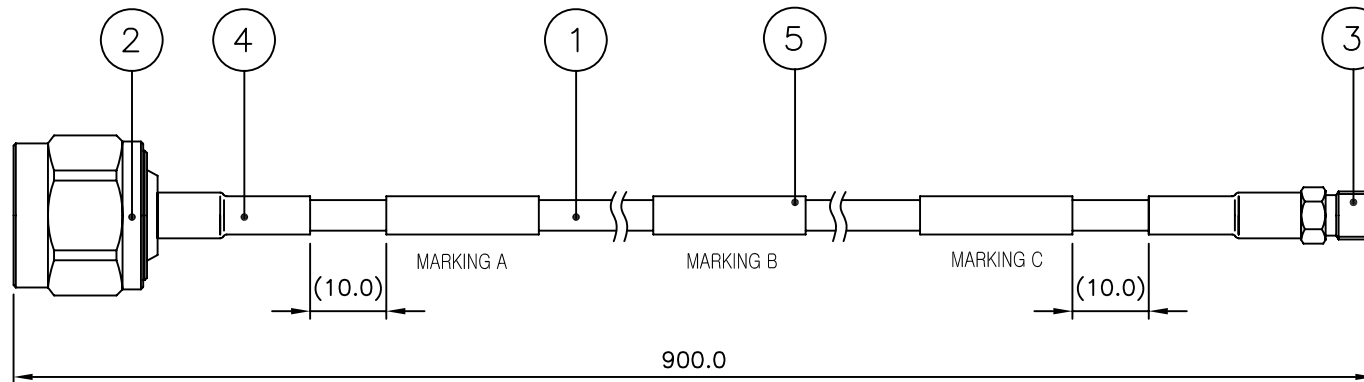

MARKING A

MARKING B

MARKING C

* PIPE 반만 압착할 것

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N50 PS-----▶▷BODY : Nickel Plate
CONTACT : Gold Plate
CAP : Nickel Plate
 - 2-2. SMA50 JS-----▶▷BODY : Gold Plate
CONTACT : Gold Plate

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE2021. 03. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			DWG NO.	CF01566-7/1		
	SCALE	UNIT		A4	DETAIL NO.		
	N/S	mm			REVISION	I R	SHEET