


(1) GUIDE COVER는 CABLE ASSY 특성 확인 후 조립할 것
- 조립 JIG : DEQ01205-1/1+DEQ01206-1/1

(2) GUIDE COVER 조립 후 뚜껑 COVER 뒷면에 레이저마킹 할 것
- 레이저 마킹JIG : 조립 JIG와 동일 JIG 사용

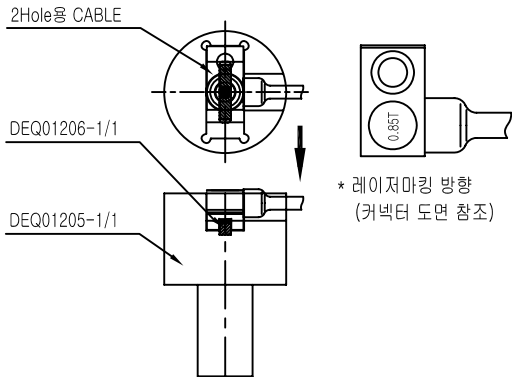

※중요※

- 절단 길이 동일하게 작업 필요
- 주파수대역 DC ~ 5GHz

MARKER(MHz)	Insertion Loss(S21)
700	-0.20±0.08
1400	-0.31±0.08
2300	-0.43±0.08
3000	-0.51±0.08
4000	-0.62±0.08
5000	-0.80±0.15
VSWR(S11)	1.6 (Max)


Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMDL50 PS----▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. MS-180 JL-2H----▶▶BODY : Nickel Plating
COVER : Nickel Plating

* 마킹내용 주의사항*
- 마킹튜브 : 0.8T
- 레이저각인 : 0.85T

*플랜지 2H 우측커팅

* CABLE LOT별 지름 치수 확인 후 작업할 것.

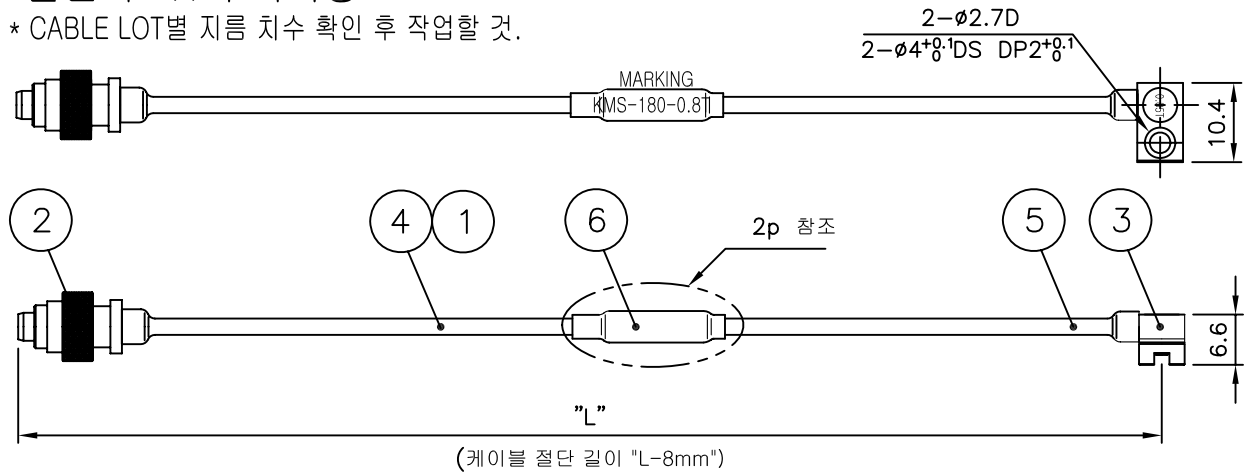

*측정방법

- SMA E cal을 사용하여 Cal 할 것.
- Test Cable

Port 1 - SMDL Conn 체결

Port 2 - KMS-180 Adaptor(AD00561-7/1) 체결 후 측정

KMS-180-0.8T
MARKING

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS		
	DATE 2021. 08. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
CUSTOMER CODE	APPROVED BY	I.C.KIM						
	CHECKED BY			TITLE				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		CABLE ASS'Y				
	CHECKED BY							
	SCALE	UNIT		A4		DWG NO.	CF01571-7/2	
	N/S	mm				DETAIL NO.		
						REVISION	I R	SHEET



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

※ 작업 형상

*품번 4를 먼저 수축한 뒤에 그위로 품번5를 겹치도록 수축한다.
 겹친부분을 품번6 으로 덮으면서 수축 한다.

