


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 06. 21.

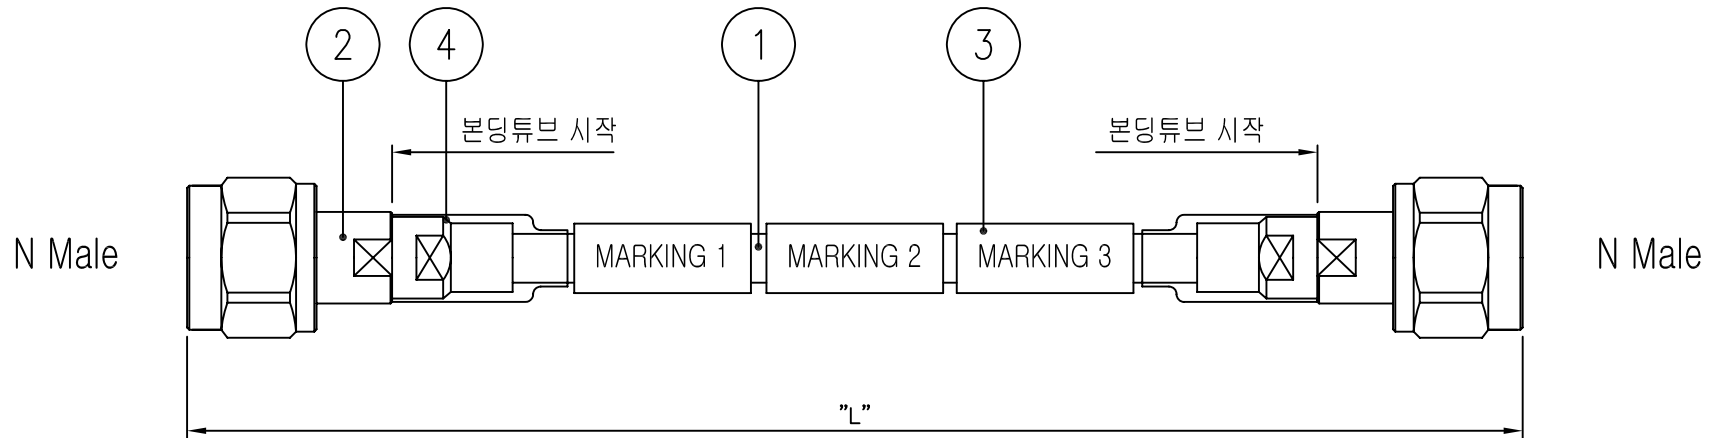

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.3
4. INSERTION LOSS (Min) : Meter당 1dB이하

■ 작업시 주의사항

1. 마킹 튜브 길이가 길면 2줄로 작업
2. 본딩튜브 파이프 적용부분 부터 적용
3. BACK NUT Roctite 도포 후 체결할 것

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. N PS---▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

4	BONDING TUBE	2	LS TUBE GSHS-3635W	ATU00405-N/1	ø12.7-40mm (Black)
3	MARKING TUBE	3	LS TUBE GSHS-1635F	ATU00407-N/1	ø8-40mm (White)
2	CONNECTOR	2	KJ COMTECH	CN03976-7/1	N50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00449-N/1	LH21r (BLUE)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2021. 06. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
APPROVED BY		I.C.KIM		TITLE	
CHECKED BY					
DRAWN BY		S.Y.EUN			
CHECKED BY					
SCALE		UNIT	A4		
N/S	mm				
			DWG NO.		CF01572-7/1
			DETAIL NO.		
			REVISION		I R
			SHEET		1 of 1



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE CABLE ASS'Y
DWG NO. CF01572-7/1
DETAIL NO.

REVISION I R SHEET 1 of 1