


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1GHz~3GHz
3. VSWR (Max) : 1.2
4. Insertion loss(Min) : -1.0dB

REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2021. 03. 30.

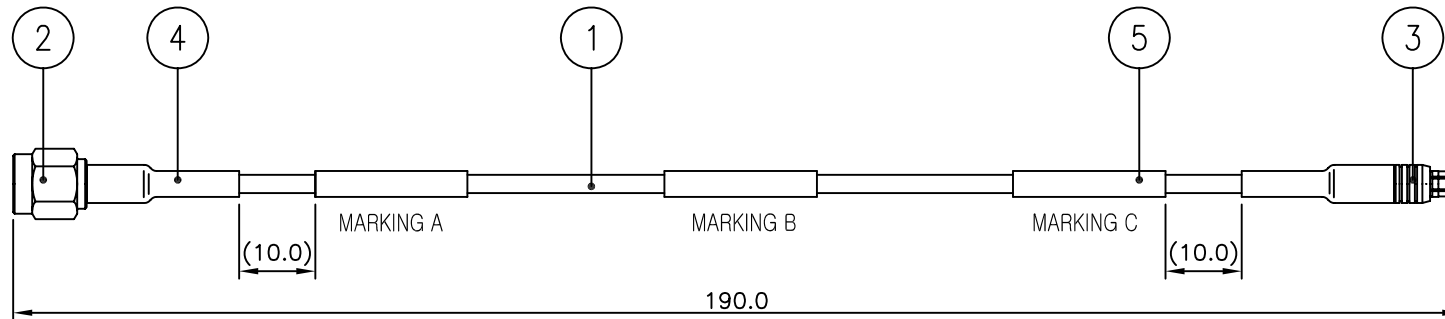

MARKING A

MARKING B

MARKING C

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS-----▷▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. MCX PS-----▷▷BODY : Gold Plating
JACK : Gold Plating
CONTACT : Gold Plating

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2021. 03. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY			TITLE CABLE ASS'Y		
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN				
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				A4	DWG NO.	CF01576-7/1
					DETAIL NO.	
				REVISION	I R	SHEET 1 of 1