REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021. 08. 13.

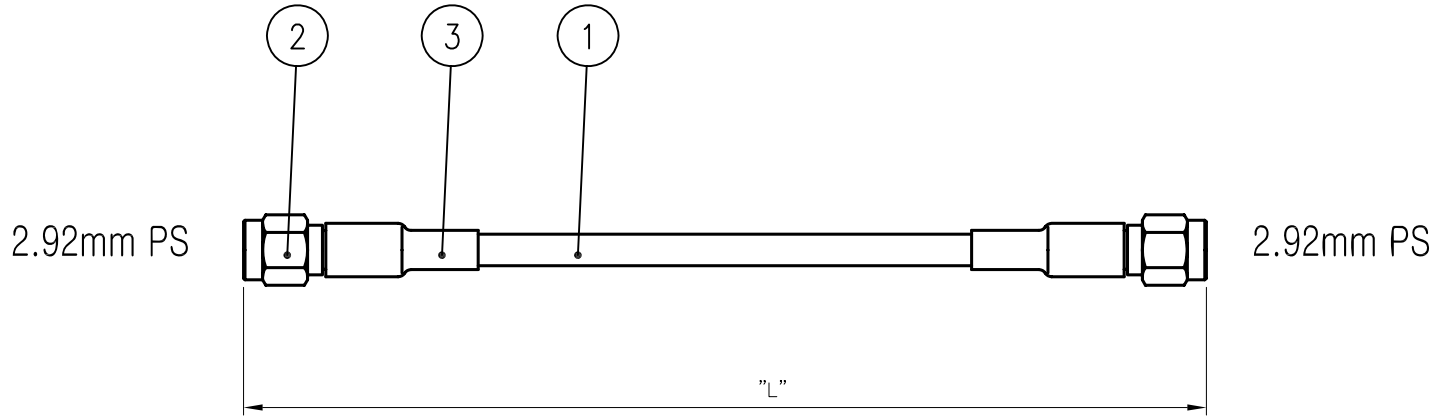

*전기적 특성

1	Frequency range	DC ~ 6GHz	
2	Impedance	50ohm Nominal	
3	V.S.W.R	1.2 : 1 max @6GHz	
4	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA & WCDMA	3차 : -165dBc max



PIPE 반만 압착 할 것

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
   2-1. 2.92mm PS----▶ ▷BODY : Suco Plating (3㎛)
   CONTACT : Silver Plating (5㎛)
   CAP : Nickel Plating

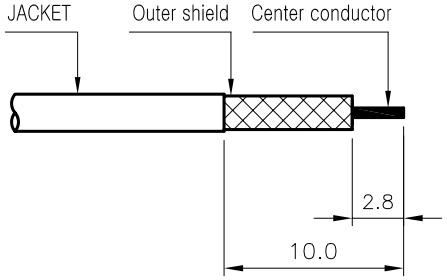

CABLE STRIPPING

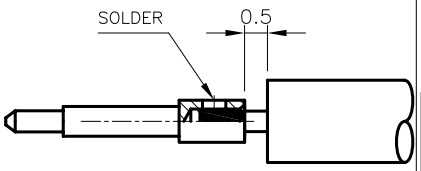

PIN SOLDER

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
3	BONDING TUBE	2	LS TUBE	ATU00006-N/1	⌀6-30mm Black
2	CONNECTOR	2	KJ COMTECH	CN04009-7/1	2.92mm PS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	MF141(50Ω) BLUE - SS402

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%

DATE	2021. 08. 13.
APPROVED BY	
CHECKED BY	
DRAWN BY	I.C.KIM
CHECKED BY	
SCALE	N/S
UNIT	mm

KJ COMTECH
KJ COMTECH CO.,LTD.
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE: CABLE ASS'Y

A4

DWG NO.	CF01584-7/1
DETAIL NO.	
REVISION	I R
SHEET	1 of 1