



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PB (R/N)-----▶ BODY : 이원합금(Ni/Tin) Plating
CONTACT : Gold Plating
CAP : Nickel Plating이원합금(Ni/Tin) Plating


* ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~1.8GHz
 - 2-1. BAND 3 : 1.8GHz
 - 2-2. BAND 8 : 900MHz
 - 2-3. BAND 28 : 700MHz
3. VSWR (Max) : 1.2

*Compliance with standard IP67

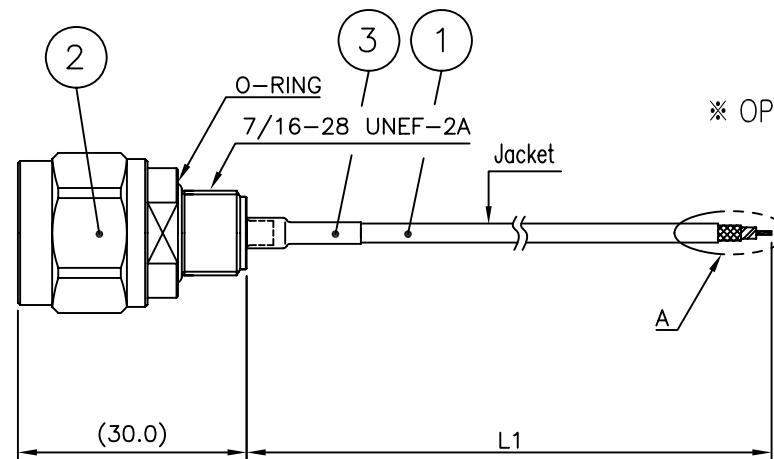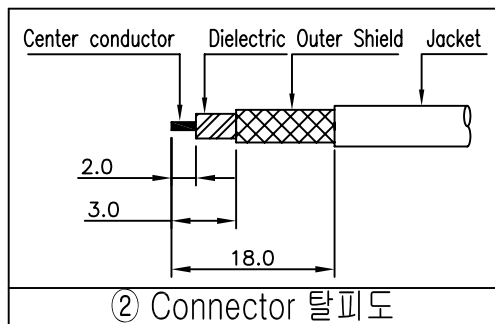

※ OPEN탈피 디핑처리할 것

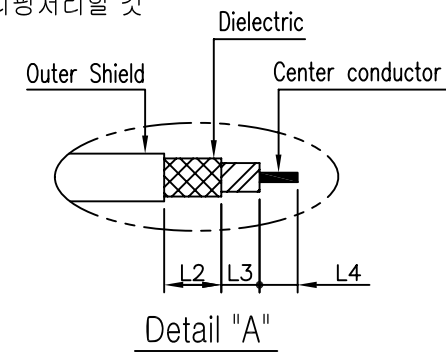

■ 포장사양

- : N Male CAP부위 보호테이프로 감싼 후 비닐포장
- 보호테이프 : CPA00118-N/1 (투명 50mm*150M)
 - 비닐(소) : DVB00045-N/1 200x250 10EA씩
 - 대박스 : DBX00073-N/1 385x308x173
1BOX당 기준 200EA씩



* NUT, WASHER 구성 X

3	BONDING TUBE	1	LS TUBE	ATU00004-N/1	Ø4-15mm BLACK
2	CONNECTOR	1	KJ COMTECH	CN03925-7/2	N50 PB (R/N)
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316 (BROWN)
NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
2021. 09. 06.					
APPROVED BY	I.C.KIM				
CHECKED BY					
DRAWN BY	S.Y.EUN	TITLE			
CHECKED BY		RF CABLE			
SCALE	UNIT		A4	DWG NO.	CF01588-7/1
1/1	mm			DETAIL NO.	
				REVISION	I R

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm : +5, -0	
1000 ~ 2000mm : +10, -0	
2000 ~ 3000mm : +15, -0	
3000 ~ 4000mm : +20, -0	
4000 ~ 5000mm : +25, -0	
5000 ~ : +10%	

