


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.10.22.

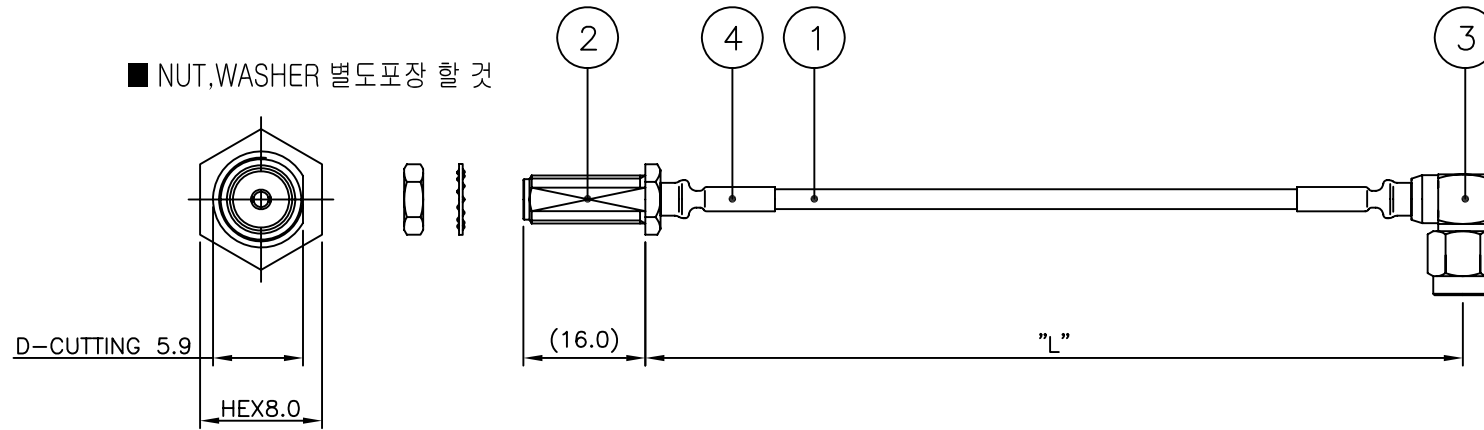

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~2.1GHz

V.S.W.R (Max.) : 1.2

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. SMA JB (F/N) --> BODY : Nickel Plating
CONTACT : Gold Plating
NUT/WASHER : Nickel Plating

2-2. SMA PL -----> BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4~20mm (BLACK)
3	CONNECTOR	1	KJ COMTECH	CN02748-7/7	SMA50 PL (금형)
2	CONNECTOR	1	KJ COMTECH	CN01050-7/2	SMA50 JB (F/N)
1	COAXIAL CABLE		EXPANTEL	ACA00036-N/1	85FJ(50Ω) CLEAR

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2021. 10. 22.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0. ~ -3.0.	DRAWN BY	S.Y.EUN		TITLE CABLE ASS'Y			
	CHECKED BY						
	SCALE 1/1	UNIT			A4		
				DWG NO.	CF01595-7/1		
				DETAIL NO.			
				REVISION	I R	SHEET 1 of 1	