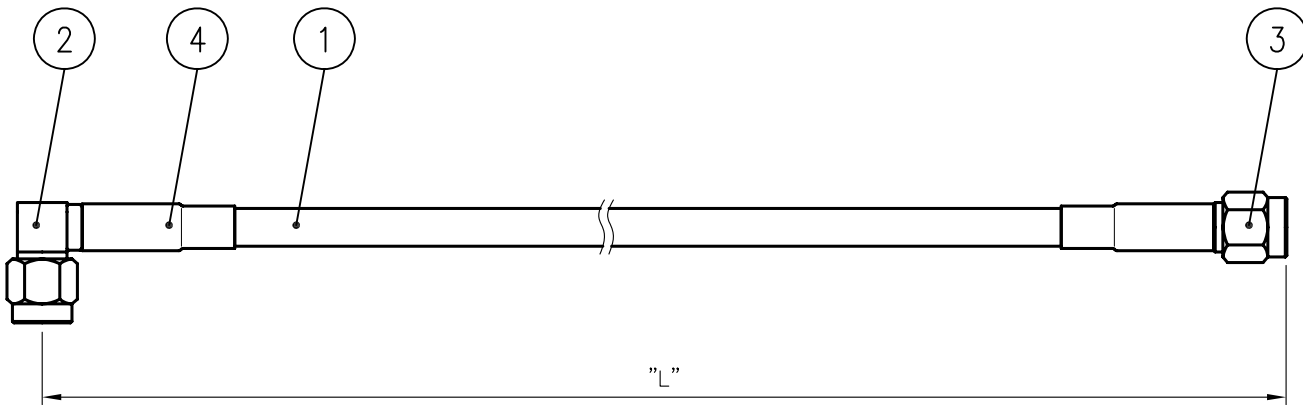


1		2		3		4		5		6			
* ELECTRICAL SPECIFICATIONS Impedance : 50Ω Frequency Range : DC~6GHz V.S.W.R (MAX) : 1.2						REVISION							
						REV	DESCRIPTION				DRAWN	APPR	DATE
						IR	Initial Registration				I.C.KIM		2021. 11. 19.
													
Notes 1. RoHS & Pb-FREE 2. CONNECTOR FINISHES 2-1. SMA PL-▶▷BODY : Gold Plating CONTACT : Gold Plating CAP : Nickel Plating 2-2. SMA PS-▶▷BODY : Gold Plating CONTACT : Gold Plating CAP : Nickel Plating						4		SHRINK TUBE	2	LS TUBE	ATU00060-N/1	ø6-20 Black	
						3		CONNECTOR	1	KJ COMTECH	CN00918-7/1	SMA50 PS	
						2		CONNECTOR	1	KJ COMTECH	CN00126-7/5	SMA50 PL	
						1		COAXIAL CABLE		EXPANTEL	ACA00058-N/1	RG400(Q) BROWN	
CUSTOMER		NO.		DESCRIPTION	Q'TY	VENDER	PART NO.		RAMARKS				
		DATE		2021. 11. 19.				RF & MICROWAVE TECHNOLOGY					
CUSTOMER CODE		APPROVED BY				TITLE		CABLE ASS'Y					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%		CHECKED BY				DWG NO.		CF01603-7/1					
		DRAWN BY		I.C.KIM		DETAIL NO.							
		CHECKED BY				REVISION		I R		SHEET			
		SCALE		UNIT		mm		A4		1 of 1			
		N/S											