



REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2021. 12. 10.

* ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~5.9GHz
3. VSWR (Max) : 1.2

*Compliance with standard IP67

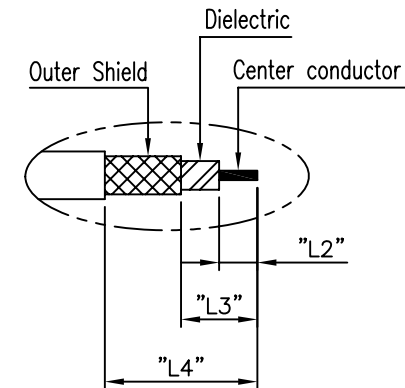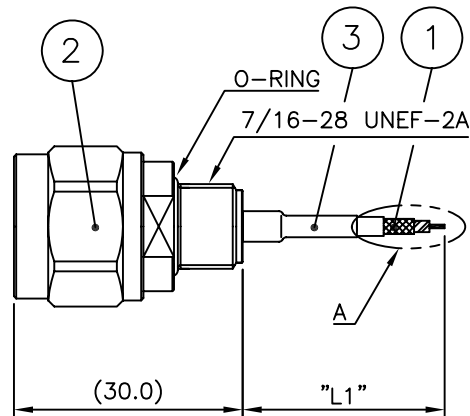

Detail "A"

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PB (F/F)-----▶ BODY : 이원합금(Ni/Tin) Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating이원합금(Ni/Tin) Plating

■ 포장사양

- : N Male CAP부위 보호테이프로 감싼 후 비닐포장
- 보호테이프 : CPA00118-N/1 (투명 50mm*150M)
 - 비닐(소) : DVB00012-N/1 120x150 10EA씩
 - 비닐(중) : DVB00017-N/1 200x300 100EA씩
 - 대박스 : DBX00073-N/1 385x308x173
- 1BOX당 기준 500EA씩

투명 보호테이프



3	BONDING TUBE	1	LS TUBE	ATU00004-N/1	Ø4-15mm BLACK
2	CONNECTOR	1	KJ COMTECH	CN03925-7/4	N50 PB (F/F)
1	COAXIAL CABLE		EXPANTEL	ACA00039-N/1	85FJ (BLUE-TEFLON)

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS
	DATE 2021. 12. 10.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE RF CABLE		
	SCALE	UNIT		A4	DWG NO.	CF01607-7/1
	1/1	mm			DETAIL NO.	
					REVISION	I R
					SHEET	1 of 1