


* ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~2.1GHz
3. VSWR (Max) : 1.2

*Compliance with standard IP67

REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	S.H.KIM	2021. 12. 21.

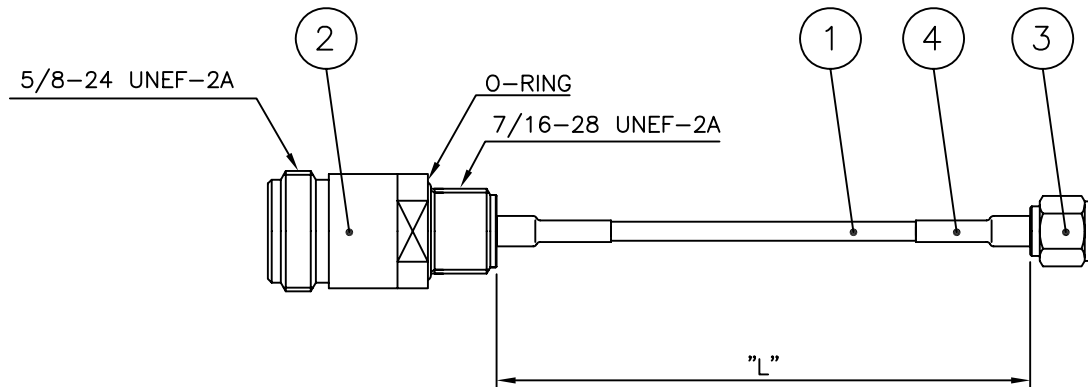


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N JB (R/N)-----▶▷BODY : 이원합금(Ni/Tin) Plating
CONTACT : Gold Plating
 - 2-2. SMA PS-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

■ 포장사양

- 비닐(소) : DVB00015-N/1 150x200 10EA씩
- 대박스 : DBX00073-N/1 385x308x173
1BOX당 기준 200EA씩



CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS	
	DATE 2021. 12. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	CUSTOMER CODE	APPROVED BY	S.H.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE RF CABLE			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01609-7/1	
	SCALE	UNIT			DETAIL NO.		
	1/1	mm			REVISION	I R	SHEET