

Notes

1. RoHS & Pb-FREE


2. CONNECTOR FINISHES

2-1. SMA PS-----▷ BODY : Gold Plate
CONTACT : Gold Plate
COUPLPING CAP : Nickel Plate

2-2. SMPM JL-----▷ BODY (A) : BRASS / Nickel Plate
BODY (B) : BeCu / Gold Plate
CONTACT : Gold Plate



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.03.29.

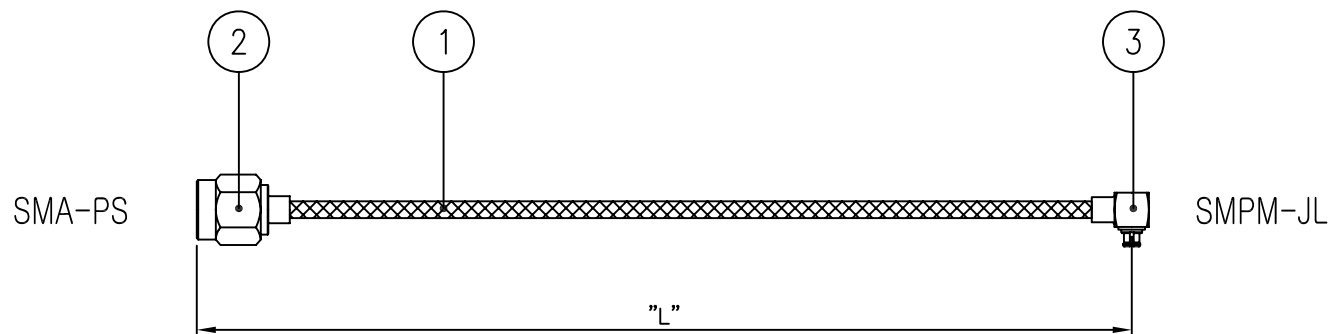

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. VSWR (Max) : 1.25

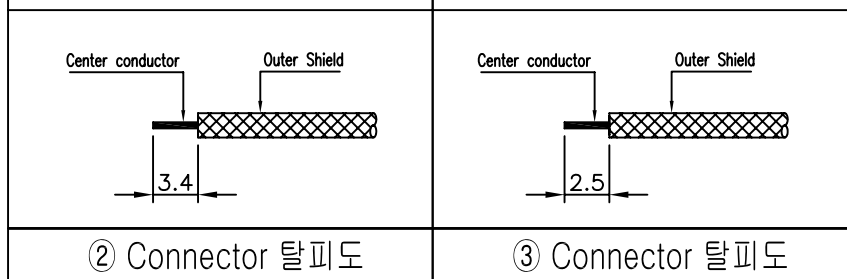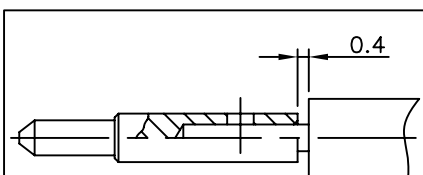

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2022. 03. 29.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		TITLE CABLE ASSEMBLY		
	CHECKED BY					
	SCALE	UNIT		A4		
	N/S	mm				
				DWG NO.	CF01624-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%