



* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1100MHz ~ 1700MHz
 - Marker 1 : 1227.6MHz
 - Marker 2 : 1575.42MHz
 - Marker 3 : 1602MHz
3. VSWR : 1.3(Max)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022. 04. 05.

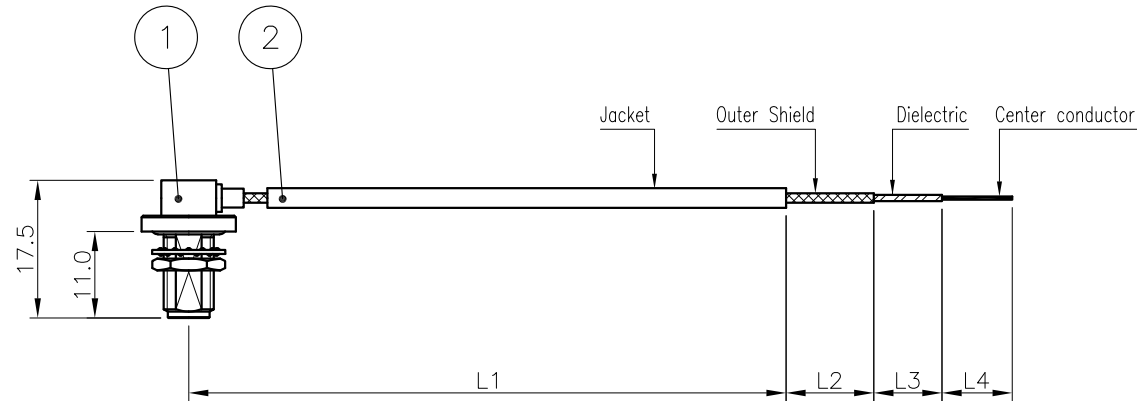


* NUT, WASHER 개별포장



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 JL-BH-----> BODY : Gold Plating
 - CONTACT : Gold Plating
 - NUT/WASHER : Gold Plating

CUSTOMER	2	케이블, 전력용	0.1M	EXSF-047T-50-CW-JK	EXPANTEL (KR)
	1	연결기, 플러그형, 전기용	1	CN04044-7/1 SMA JL-BH	KJ COMTECH (KR)
CUSTOMER CODE	NO.	DESCRIPTION	Q'TY	PART NO.	RAMARKS
	DATE 2022. 04. 05.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	APPROVED BY S.H.KIM			TITLE CABLE ASS'Y	
	CHECKED BY			DWG NO. CF01625-7/1 DETAIL NO.	
CABLE LENGTH TOLERANCE	DRAWN BY S.Y.EUN			REVISION I R SHEET 1 of 1	
	CHECKED BY			SCALE N/S UNIT mm	
	0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°			 A4	