


절단 및 탈피 길이(mm)		디핑 여부 V체크
Cable	L	—
Outer Shield	L1	—
Dielectric	L2	—
Conductor	L3	—


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023. 05. 04.

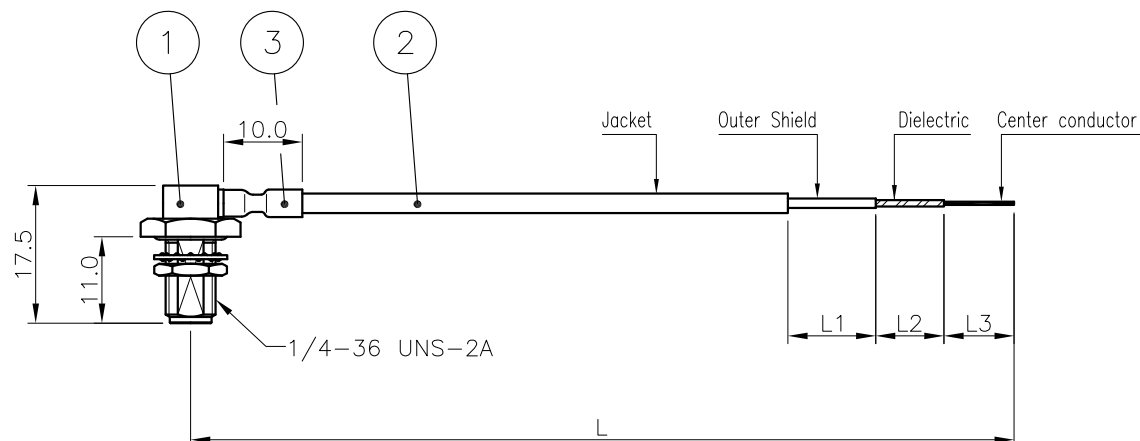

* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1100MHz ~ 1700MHz
 - Marker 1 : 1227.6MHz
 - Marker 2 : 1575.42MHz
 - Marker 3 : 1602MHz
3. VSWR : 1.3(Max)

* NUT, WASHER 개별포장

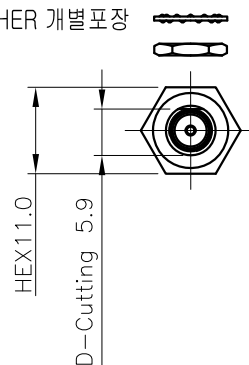

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 JL-BH-----▶▶BODY : Gold Plating
 - CONTACT : Gold Plating
 - NUT/WASHER : Gold Plating

3	절연수관, 전기용	0.01M	GSHS-3635W-3-BK	LS전선 (KR)
2	케이블, 전력용	* M	EXSF-047T-50-CW-JK	EXPANTEL (KR)
1	연결기, 플러그형, 전기용	1	CN04044-7/2 SMA JL-BH	KJ COMTECH (KR)

CUSTOMER	NO.	DESCRIPTION	Q'TY	PART NO.		RAMARKS			
	DATE		2023. 05. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
CUSTOMER CODE	APPROVED BY						KJ COMTECH CO.,LTD.		
	CHECKED BY								
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°	DRAWN BY		S.H.KIM		TITLE CABLE ASS'Y				
	CHECKED BY								
	SCALE		UNIT		A4				
	N/S		mm						
									
						DWG NO.		CF01625-7/2	
						DETAIL NO.			
						REVISION		I R	SHEET 1 of 1