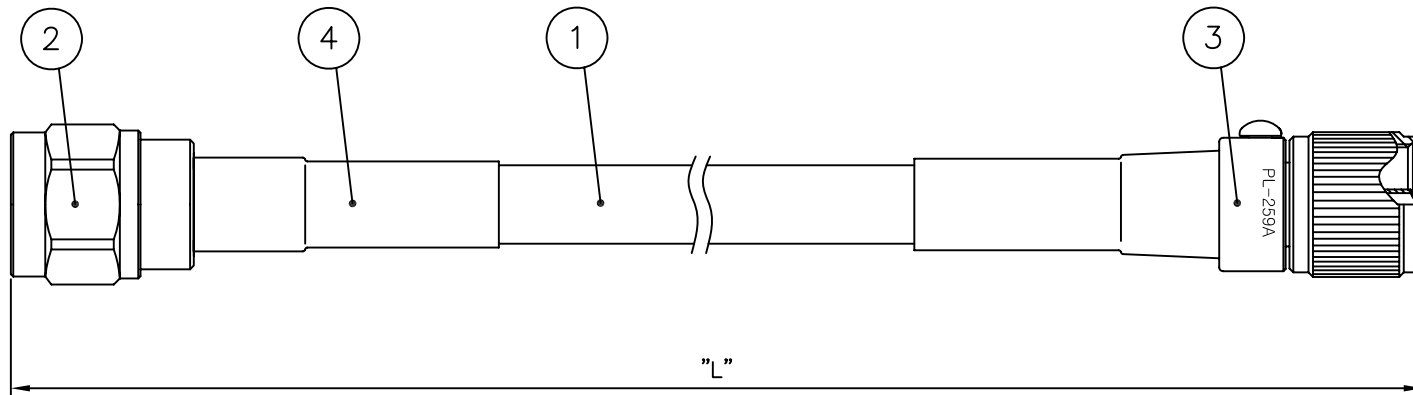


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022. 05. 26.
△				



Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1.N50 PS-----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

2-2.UHF50 PS----▶▷BODY : Nickel Plating
CONTACT : Silver Plating
CAP : Nickel Plating

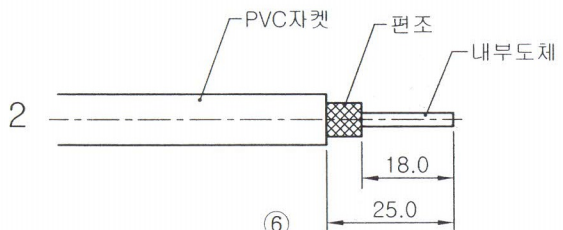

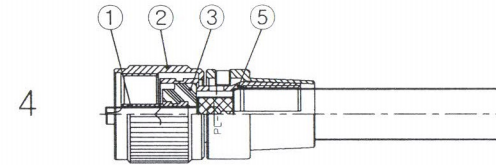
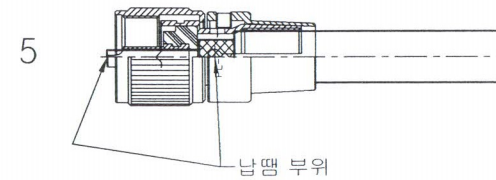

4	BONDING TUBE (국방)	2	LS TUBE	ATU00012-N/1	GSHS-3635W-ø12-BK ø12-40mm BLACK
3	CONNECTOR	1	성진정보통신	CN03613-N/1	UHF50-PS
2	CONNECTOR	1	KJ COMTECH	CN00862-7/1	N50-PS
1	COAXIAL CABLE		COAX PARK	ACA00068-N/1	COAX-400(50Ω) (=LMR400)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2022. 05. 26.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY			TITLE CABLE ASS'Y		
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN				
	CHECKED BY					
	SCALE	UNIT		A4		
	N/S	mm				
				DWG NO.	CF01633-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1

품 명	PL-259A CABLE Ass'y
관리번호	SJ-404-021

제 조 공 정 도

결	작 성	검 토	승 인
재			

번 호	공 정 명	작 업 내 용	설 비	관리항목	참 조 도
1	재료	CONNECTOR, CABLE 준비		PL-259A CONNECTOR RG-8(213,214,393) CABLE	    
2	CABLE 탈피	CONNECTOR에 맞게 CABLE PVC자켓,편조,내부도체 탈피	탈피기	내부도체 : 18mm 편조 : 7mm	
3	CONNECTOR 부품 삽입	탈피 작업된 CABLE에 ⑥후드를 삽입한다 (작업이 용이하도록 주의하여 삽입한다)			
4	CONNECTOR 부품 조립	①PIN과 ③MOLDING으로 성형된 ⑤BODY 와 ②커플링을 회전하며 땀 위치를 조절하여 CABLE에 차례로 삽입한다			
5	납 땀	①PIN 끝과 ⑤BODY 실드를 내부도체와 납땀한다	인두기	납땀 이상유무 확인	
6	나사로 고정	⑥후드를 BODY 홈에 맞도록 체결하여 ④나사로 고정한다			
7	검수 및 포장	제품 검수 후 포장		외관 흠집 및 슛트, 단선 확인	