

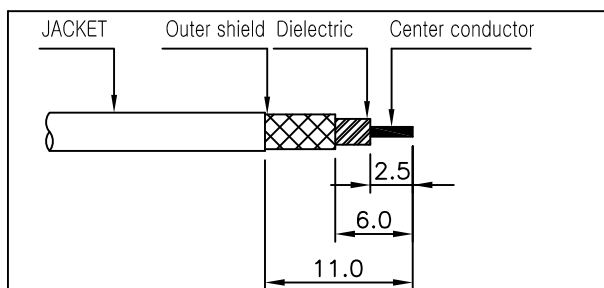


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.25

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1P	Initial Registration	S.Y.EUN	S.H.KIM	2022.06.28

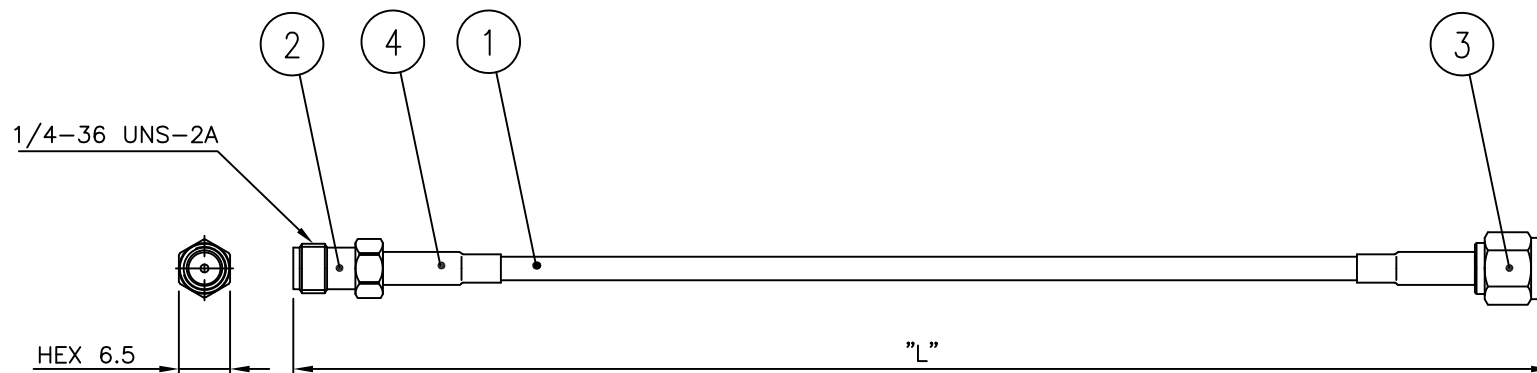


② CONNECTOR CABLE 탈피도

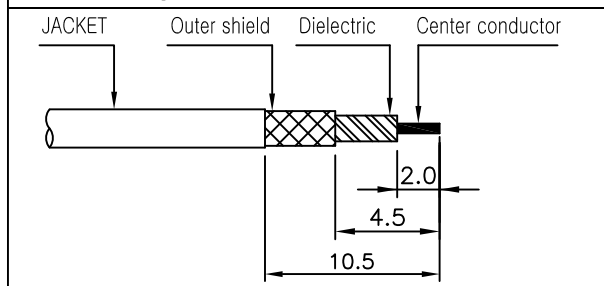

③ CONNECTOR CABLE 탈피도

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. SMA JS-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
2-2. SMA PS-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
COUPLING CAP : Nickel Plating



4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm(Black)
3	CONNECTOR	1	KJ COMTECH	CN02869-7/1	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN02768-7/3	SMA50 JS
1	COAXIAL CABLE	1	EXPANTEL	ACA00187-N/1	SIFS(50Ω) Black
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2022. 06. 28.		
APPROVED BY		S.H.KIM		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
CHECKED BY					
DRAWN BY		S.Y.EUN			
CHECKED BY					
SCALE			TITLE		
UNIT		CABLE ASSEMBLY			
N/S		mm			
A4		DWG NO.		CF01638-7/1	
		DETAIL NO.			
REVISION		IR		SHEET	
				1 of 1	