


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	S.H.KIM	2022.06.28.

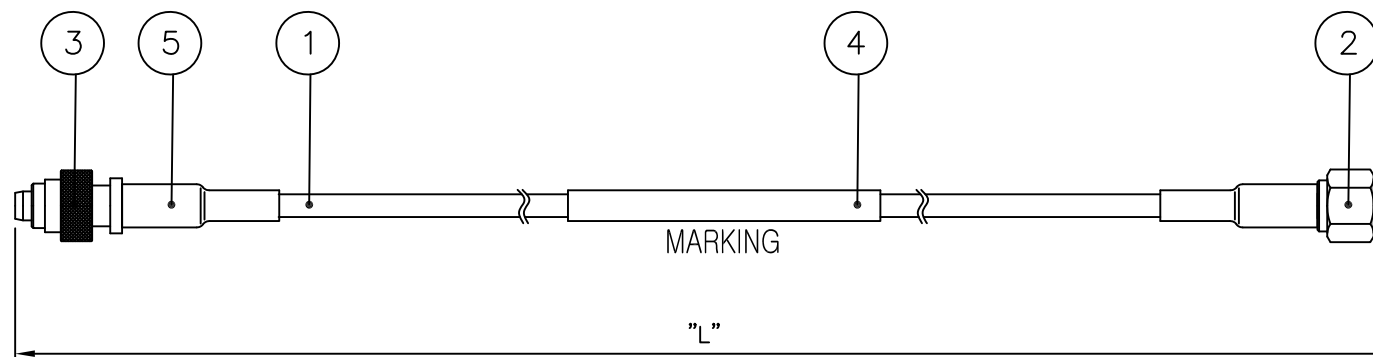

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

2-1. SMA PS --▶▷ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

2-2. SMBL50 PS--▶▷ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

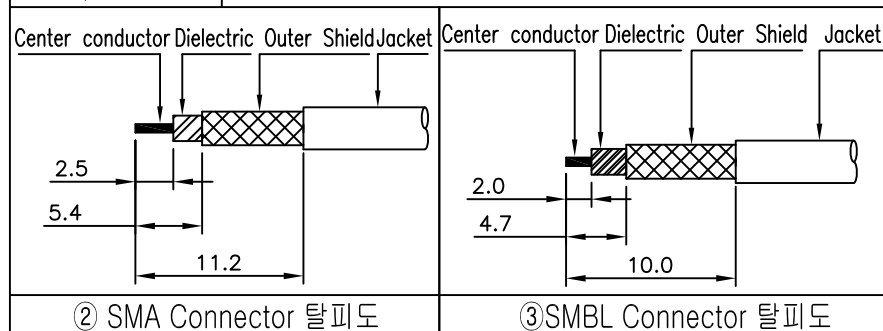

MARKING

5	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4 Black - 20mm
4	MARKING TUBE	1	LS TUBE	ATU00212-N/1	Ø4 White - 40mm
3	CONNECTOR	1	KJ COMTECH	CN03487-7/1	SMBL-PS
2	CONNECTOR	1	KJ COMTECH	CN00901-7/1	SMA-PS
1	COAXIAL CABLE		FUJIKURA	ACA00210-N/1	FUJIKURA EM-1.5D-HQEW (케이블 절단길이 1"-10mm)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
APPROVED BY		S.H.KIM			
CHECKED BY					
DRAWN BY		S.Y.EUN			
CHECKED BY			TITLE		
SCALE			CABLE ASS'Y		
UNIT			A4		
N/S mm			DWG NO. CF01639-7/1 DETAIL NO. REVISION 1 R SHEET 1 of 1		