



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. PDM JS-4H--▶▷ BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. SMS JS---▶▷ BODY : Nickel Plating
CONTACT : Gold Plating


REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022. 07. 11.

PDM Female

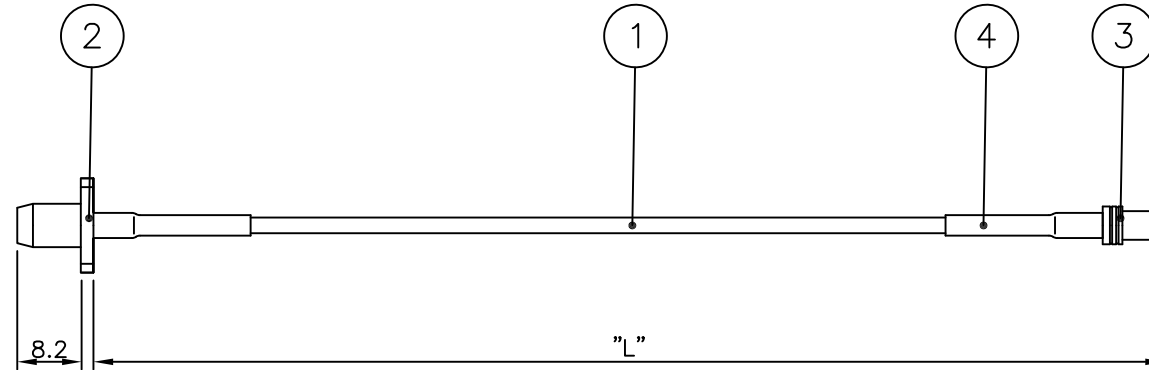


SMS Female



QMA 압착 사이즈

- ② Connector 바디 납땜 작업 ,CRIMP X
- ② Connector 케이블 쉴드 디핑 구간 주의해서 작업 요망

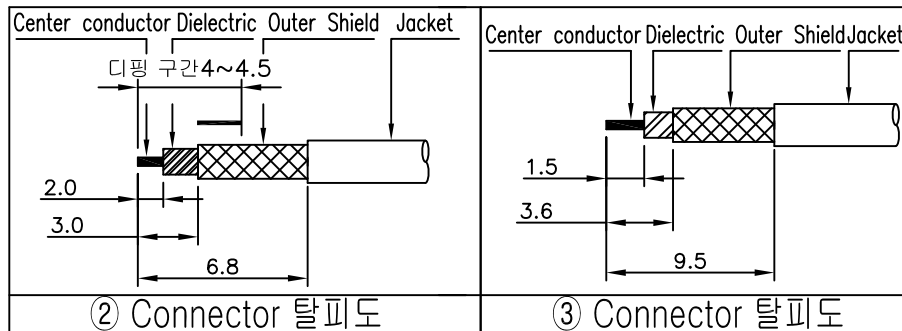

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm BLACK
3	CONNECTOR	1	KJ COMTECH	CN04041-7/1	SMS50 JS
2	CONNECTOR	1	KJ COMTECH	CN04046-7/2	PDM50 JS-4H
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316 (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS
	DATE	2022. 07. 11.				
CUSTOMER CODE	APPROVED BY	S.H.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	DRAWN BY	S.Y.EUN				
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
			RF CABLE			
			A4	DWG NO.	CF01640-7/1	
				DETAIL NO.		
				REVISION	IR	SHEET 1 of 1