


ELECTRICAL DATA :

1. FREQUENCY RANGE : DC~1GHz
2. VSWR (Max) : 1.25


REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022. 07. 11.

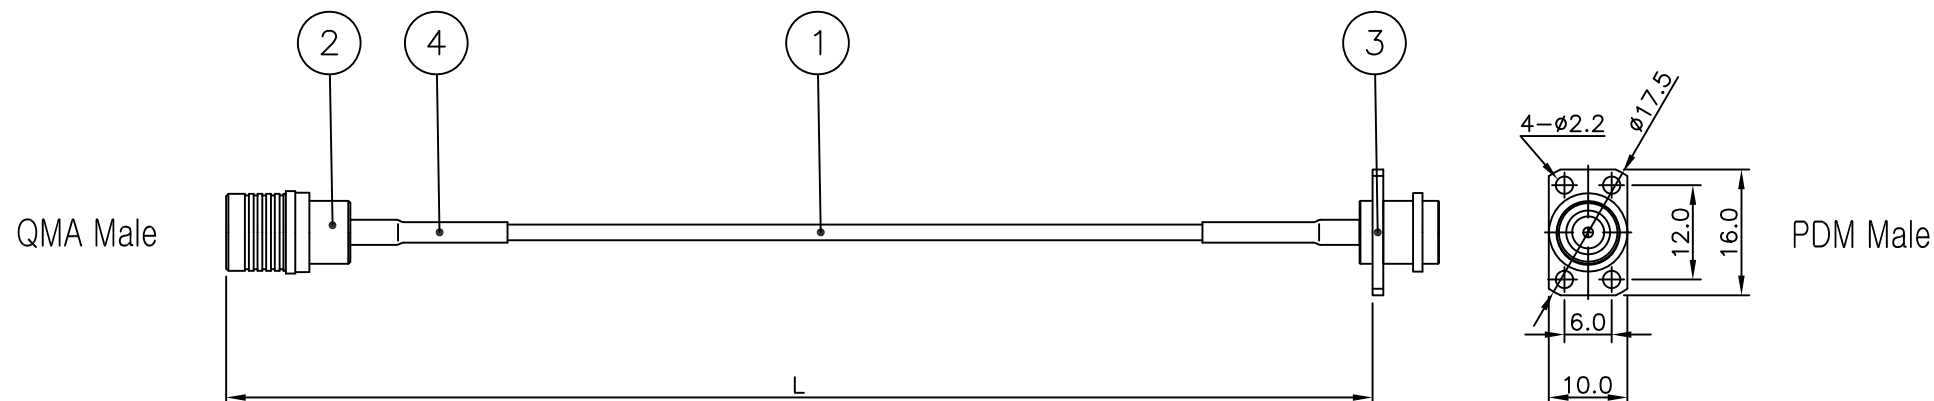

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. QMA PS---▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. PDM PS-4H--▶▷BODY : Nickel Plating
CONTACT : Gold Plating

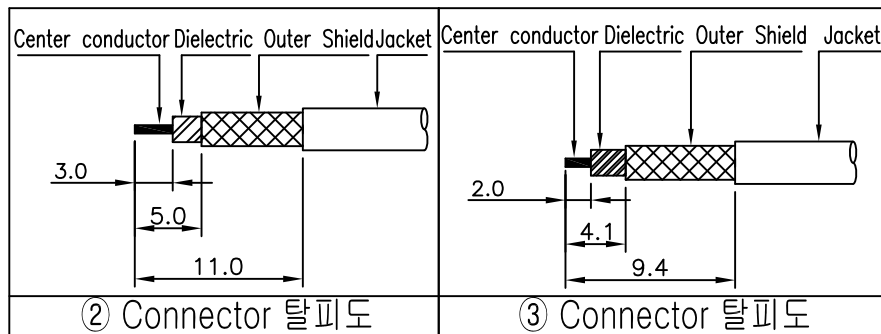

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS
	DATE	2022. 07. 11.				
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	SCALE	UNIT	TITLE			
	N/S	mm	RF CABLE			
	A4	DWG NO.	CF01641-7/1			
			REVISION I R SHEET 1 of 1			