


ELECTRICAL DATA :


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
I R	Initial Registration	S.Y.EUN	S.H.KIM	2022. 11. 07.

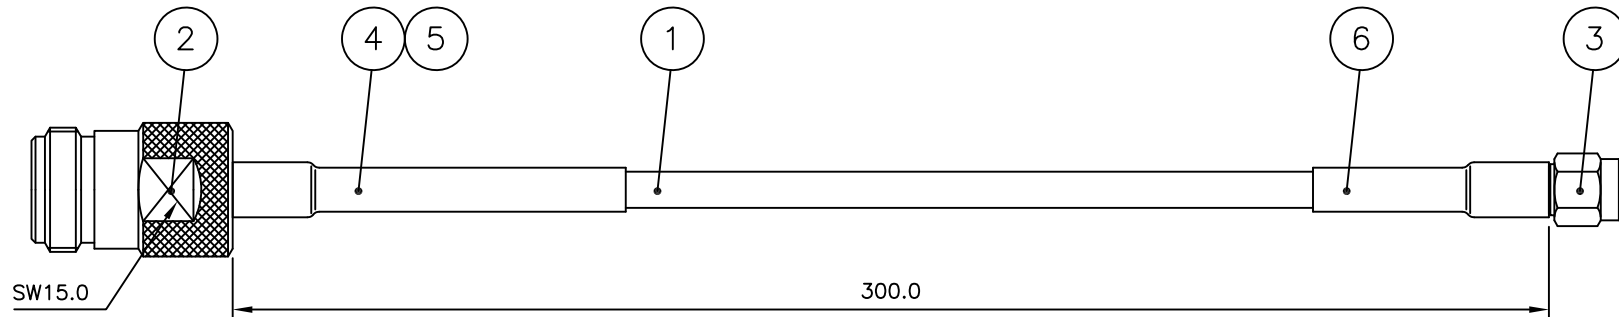

■ N-JS Assy 작업방법

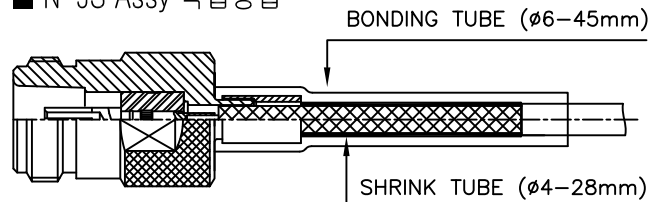

1. PIN 납땜 후 BODY에 PIN+절연체 조립품 조립
2. PIPE 압착 (HEX 5.6)
3. 쉴드 노출된 부분 수축튜브 작업 후 전체 본딩튜브 작업할 것

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N JS-----▶▶BODY : SUCO Plating (3μm)
CONTACT : Silver Plating (3μm)
 - 2-2. SMA PS----▶▶BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

6	BONDING TUBE	1	LS TUBE	ATU00006-N/1	Ø6-30mm Black
5	BONDING TUBE	1	LS TUBE	ATU00006-N/1	Ø6-45mm Black
4	SHRINK TUBE	1	LS TUBE	ATU00056-N/1	Ø4-28mm Black
3	CONNECTOR	1	KJ COMTECH	CN02764-7/1	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN02504-7/5	N50 JS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω) BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2022. 11. 07.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY					
	DRAWN BY	S.Y.EUN				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4 DWG NO. CF01665-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				