



1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR : 1.2(Max)
4. INSERTION LOSS : 1.2dB(Max)


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	S.H.KIM	2022.12.14.

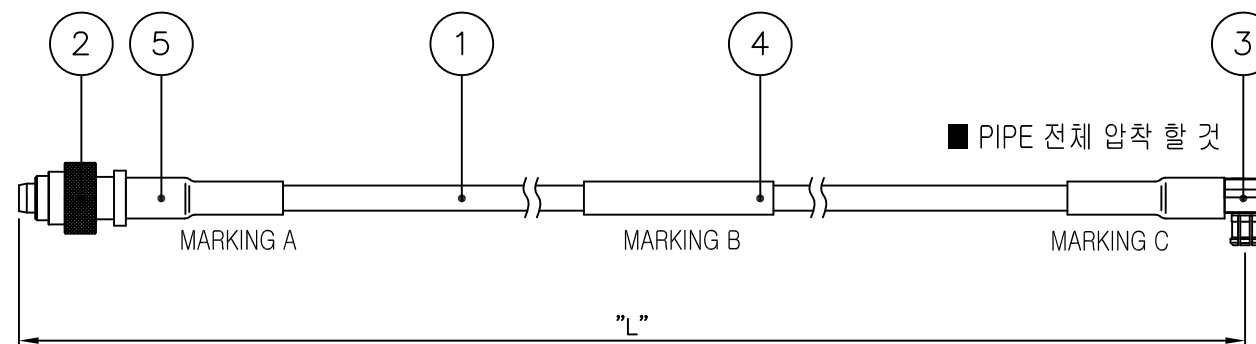


- MARKING A.C는 마킹내용이 센터가 아닌 PIPE 뒤쪽 끝으로 위치하도록 작업할 것



MARKING A




MARKING B



MARKING C

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMBL PS-----▶▷ BODY : Nickel Plating
CONTACT : Gold Plating
CAP: Nickel Plating
 - 2-2. MCX PL-----▶▷ BODY : Gold Plating
CONTACT : Gold Plating
3. TUBE 난연등급 VW-1 제품 적용할 것
4. 상용부품에 대하여 동등품 이상일 경우 대체 가능함



5	MARKING TUBE	2	LS TUBE	ATU00411-N/1	GSHS-1625G-Ø4-W/Ø4-20 White
4	MARKING TUBE	1	LS TUBE	ATU00411-N/1	GSHS-1625G-Ø4-W/Ø4-30 White
3	CONNECTOR	1	KJ COMTECH	CN00034-7/4	MCX50 PL
2	CONNECTOR	1	KJ COMTECH	CN02814-7/4	SMBL50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	EXMF-085T-50-CW 85MF(50Ω) - BULE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE		2022. 12. 14.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011		
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN			TITLE RF CABLE	
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				DWG NO.	CF01671-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1