
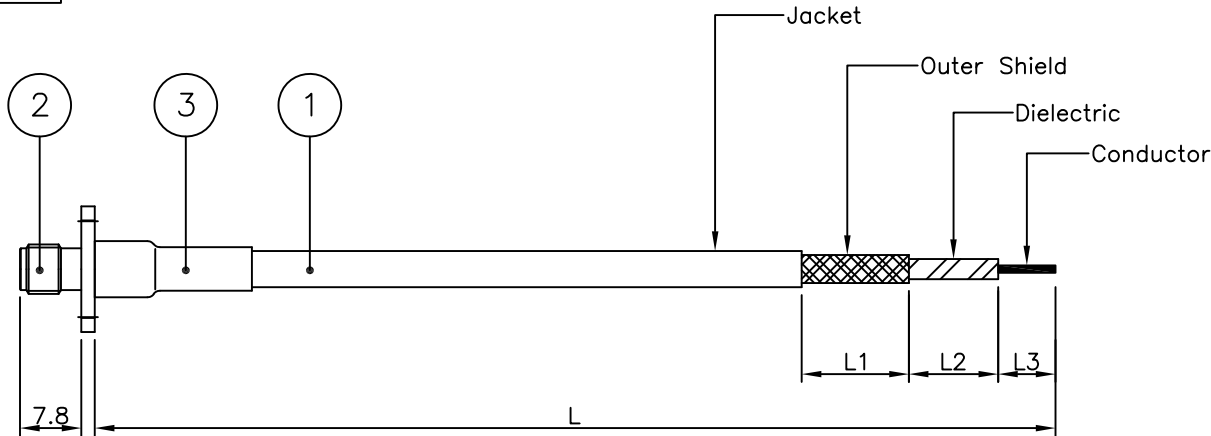



절단 및 탈피 길이(mm)			디핑 여부 V체크
Cable	L		—
Outer Shield	L1		□
Dielectric	L2		—
Conductor	L3		—

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△IR	Initial Registration	S.H.KIM		2023. 04. 10.
△				




Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - SMA JS-2H ----▶▶BODY : Gold Plating
CONTACT : Gold Plating

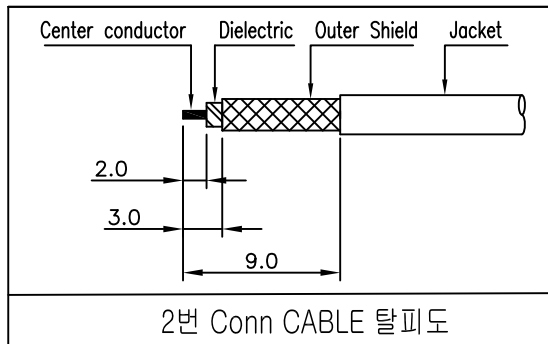

3	SHRINK TUBE	1	LS TUBE	ATU00376-N/1	GSHS-1635F Ø1/4"-20mm Black
2	CONNECTOR	1	KJ COMTECH	CN00145-7/1	SMA50 JS-2H
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω) (BLUE)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2023. 04. 10.		
CUSTOMER CODE			APPROVED BY		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			mm		
			TITLE		
			CABLE ASS'Y		
			DWG NO.		
			CF01687-7/1		
			DETAIL NO.		
			REVISION		
			I R		
			SHEET		
			1 of 1		



A4