
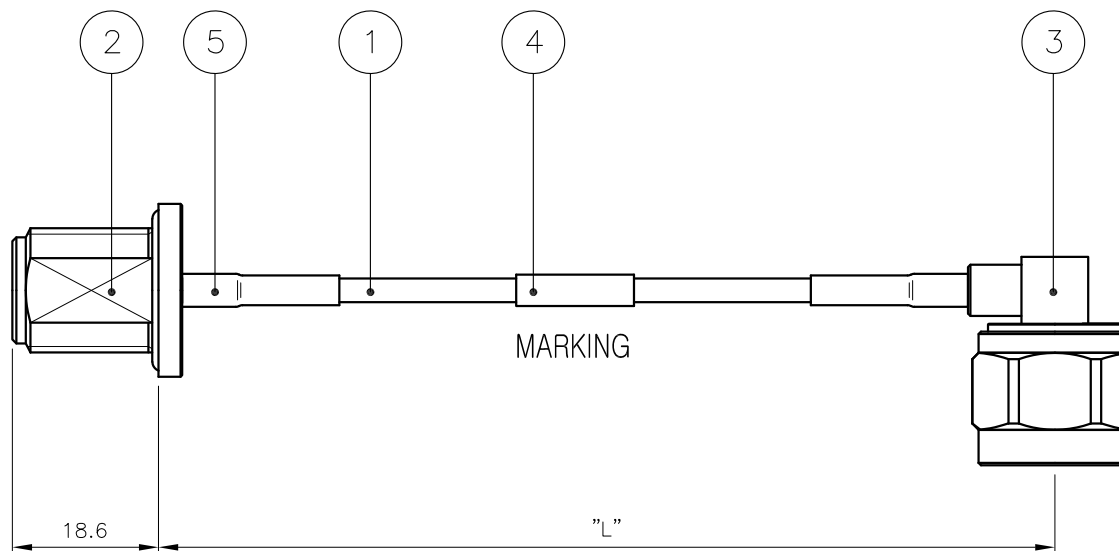



ELECTRICAL DATA

1. IMPEDANCE : 50ohm (Nominal)
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.6
4. OPERATING TEMP : -40°C ~+165°C

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.08.31.



MARKING

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

- 2-1. N50 JB-----▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
NUT : Nickel Plating
WASHER : Nickel Plating
- 2-2. N50 PL-----▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

5	SHRINK TUBE	2	LS TUBE	ATU00358-N/1	GSHS-1635F-Ø-4-BK Ø4-20mm (Black)
4	MARKING TUBE	1	LS TUBE	ATU00356-N/1	GSHS-1635F-Ø-4-WH Ø4-15mm (White)
3	CONNECTOR	1	KJ COMTECH	CN00495-7/2	N50 PL
2	CONNECTOR	1	KJ COMTECH	CN02034-7/4	N50 JB
1	COAXIAL CABLE		EXPANTEL	ACA00050-N/1	RG316DS(50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2023. 08. 31.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY					
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.H.KIM		TITLE CABLE ASS'Y		
	CHECKED BY					
	SCALE	UNIT		A4		
	N/S	mm				
				DWG NO.	CF01703-7/1	
			DETAIL NO.			
			REVISION	I R	SHEET 1 of 1	