


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.H.KIM		2023. 08. 31.

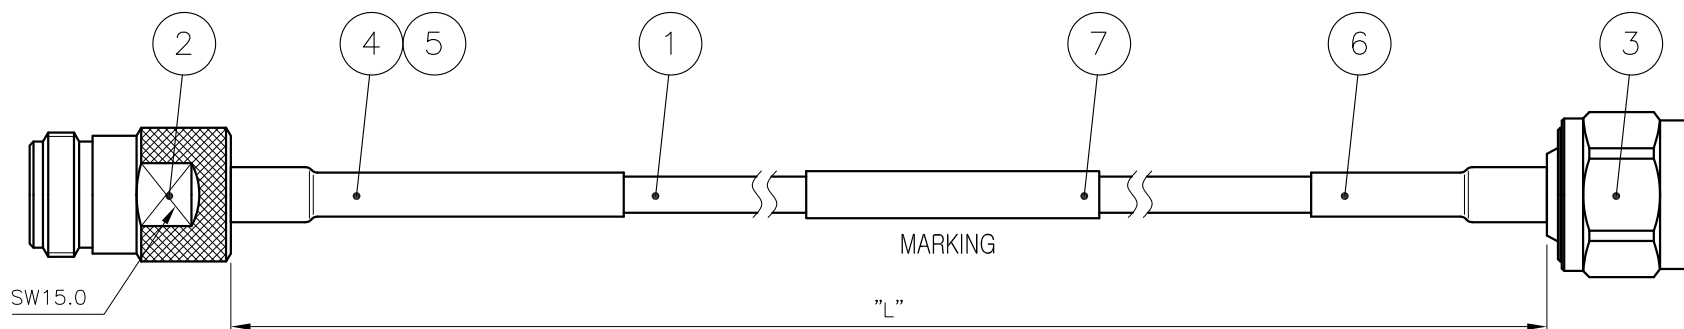

1. PIN 납땜 후 BODY에 PIN+절연체 조립품 조립
2. PIPE 압착 (HEX 5.6)
3. 실드 노출된 부분 수축튜브 작업 후 전체 본딩튜브 작업할 것

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N JS-----▶▷ BODY : SUCO Plating (3μm)
CONTACT : Silver Plating (3μm)
 - 2-2. N PS-----▶▷ BODY : Nickel/Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

MARKING

7	MARKING TUBE	1	LS TUBE	ATU00216-N/1	Ø6-40mm White
6	BONDING TUBE	1	LS TUBE	ATU00006-N/1	Ø6-30mm Black
5	BONDING TUBE	1	LS TUBE	ATU00006-N/1	Ø6-45mm Black
4	SHRINK TUBE	1	LS TUBE	ATU00056-N/1	Ø4-28mm Black
3	CONNECTOR	1	KJ COMTECH	CN02758-7/8	N50 PS
2	CONNECTOR	1	KJ COMTECH	CN02504-7/5	N50 JS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω) BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS		
	DATE 2023. 08. 31.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011 KJ COMTECH CO.,LTD.				
CUSTOMER CODE	APPROVED BY			TITLE CABLE ASS'Y				
	CHECKED BY							
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.H.KIM		A4				
	CHECKED BY							
	SCALE	UNIT			DWG NO.		CF01705-7/1	
	N/S	mm			DETAIL NO.			
				REVISION		I R	SHEET	1 of 1