

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023. 08. 31.

ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR(Max) : 1.3 OR RETURN LOSS (Max) : 17.7dB

MECHANICAL DATA :


1. TEMPERATURE RANGE : -40° C ~ 105°C

■내전압 : 750V rms 검사 할 것


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

2-1. SMA PS-----▷ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

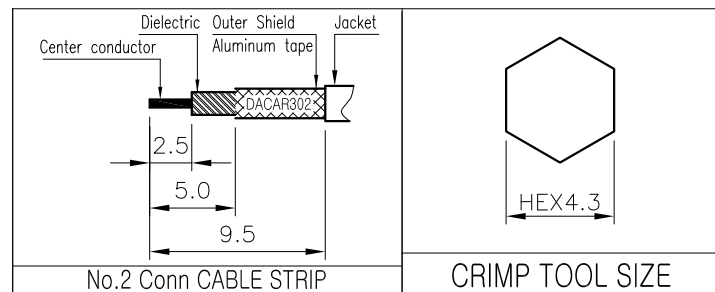

SMA-PS

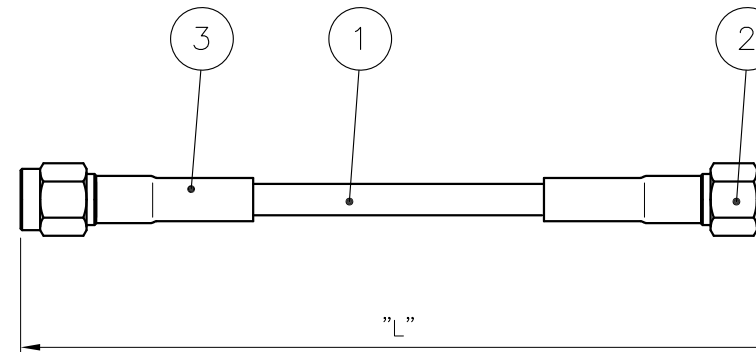

SMA-PS

3	BONDING TUBE	2	LS TUBE	ATU00006-N/1	Ø6-20 (Black)
2	CONNECTOR	2	KJ COMTECH	CN03916-7/1	SMA-PS
1	COAXIAL CABLE		LEONI	ACA00467-N/3	DAKAR302-4 (BLACK)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2023. 08. 31.		
CUSTOMER CODE			APPROVED BY		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			mm		
			TITLE		
			CABLE ASS'Y		
			DWG NO.		
			CF01706-7/1		
			DETAIL NO.		
			REVISION		
			I R		
			SHEET		
			1 of 1		