


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.10.05.

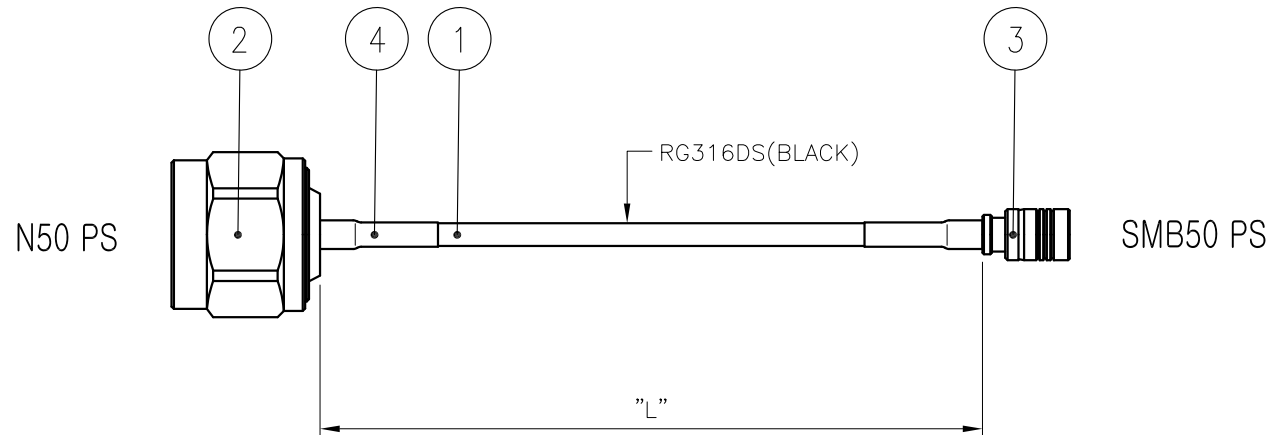

ELECTRICAL DATA

1. IMPEDANCE : 50ohm (Nominal)
2. FREQUENCY RANGE : DC ~ 3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Max) : 2.1dB (1M 기준)
4.2dB (2M 기준)

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N50 PS--▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. SMB50 PS----▶▶BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating

4	BONDING TUBE	2	LS TUBE	ATU00366-N/1	GSHS-3635W Ø4 - 20mm Black
3	CONNECTOR	1	KJ COMTECH	CN00189-7/1	SMB50 PS
2	CONNECTOR	1	KJ COMTECH	CN02804-7/1	N50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00050-N/2	RG316DS(50Ω) (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE2023. 10. 05.			 COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY					
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY		S.H.KIM	A4 DWG NO. CF01710-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				