
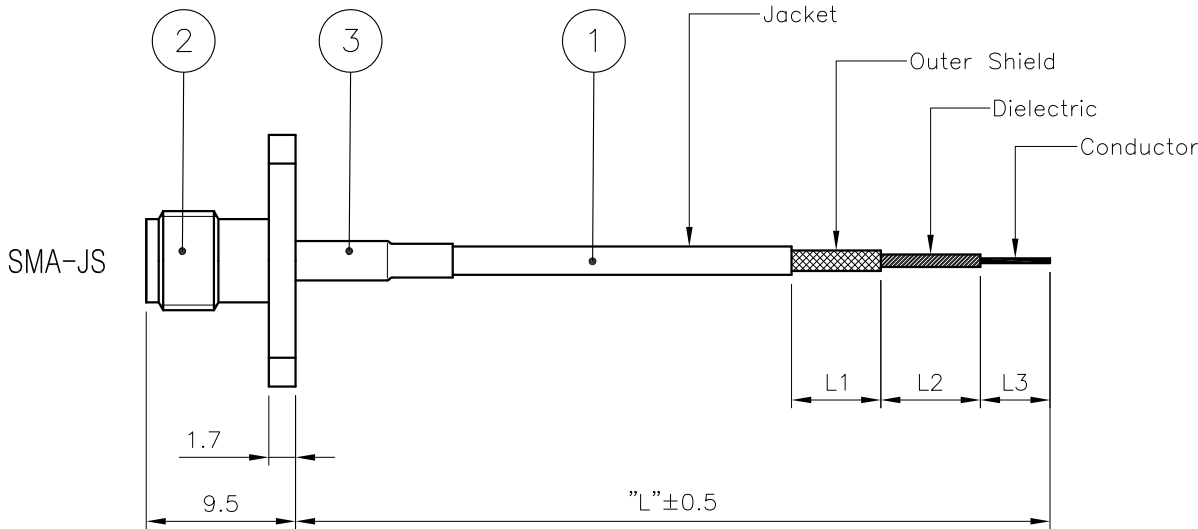


절단 및 탈피 길이(mm)			디핑 여부 V체크
Cable	L		—
Outer Shield	L1		☐
Dielectric	L2		—
Conductor	L3		☐

REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024. 01. 04.

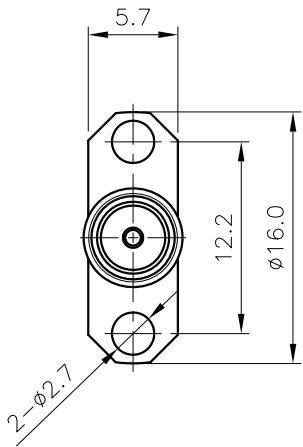

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - SMA50 JS--▶▷BODY : Gold Plating
CONTACT : Gold Plating

3	BONDING TUBE	1	LS TUBE	ATU00366-N/1	GSWS-3635W-04-BK Ø4-20mm
2	CONNECTOR	1	KJ COMTECH	CN03740-7/1	SMA50 JS-2H
1	COAXIAL CABLE		EXPANTEL	ACA00046-N/1	RG178(50Ω) (BROWN)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2024. 01. 04.		
CUSTOMER CODE			APPROVED BY		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			mm		
5000 ~ : +10%			N/S		
			TITLE		
			CABLE ASS'Y		
			DWG NO.		
			CF01727-7/1		
			DETAIL NO.		
			REVISION		
			I R		
			SHEET		
			1 of 1		