




■1본 작업 후 내전압 쇼트 문제 없을시 작업할 것
-AC 200V Rms

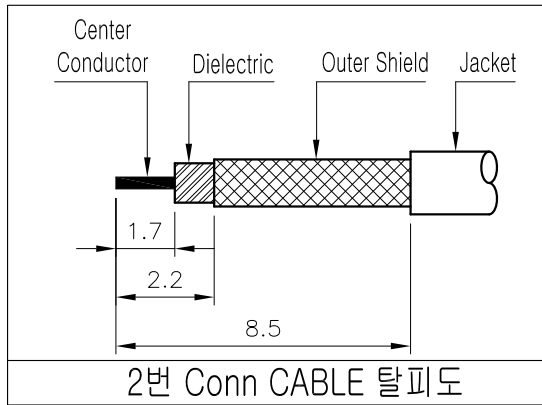

- * ELECTRICAL DATA
1. FREQUENCY RANGE : DC~9GHz
2. VSWR : 1.35(Max)

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
- 2-1. SMA JS---▶▶ BODY : Gold Plating
CONTACT : Gold Plating
- 2-2. MHF 7S---▶▶ BODY : Ni-TOP

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024. 04. 11.

3	BONDING TUBE	1	LS TUBE	ATU00003-N/1	Ø3-15 (BLACK)
2	CONNECTOR	1	KJ COMTECH	CN03431-7/1	SMA50 JS
1	COAXIAL CABLE		I-PEX	ACA00549-N/1	MHF 7S/#32-Ø1.13 (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER		PART NO.	RAMARKS			
	DATE 2024. 04. 11.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017						
CUSTOMER CODE	APPROVED BY					TITLE CABLE ASSY				
	CHECKED BY									
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY		S.H.KIM							
	CHECKED BY									
	SCALE		UNIT		A4		DWG NO.		CF01733-7/1	
	2/1		mm				DETAIL NO.			
							REVISION		I R	