



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024.05.17.

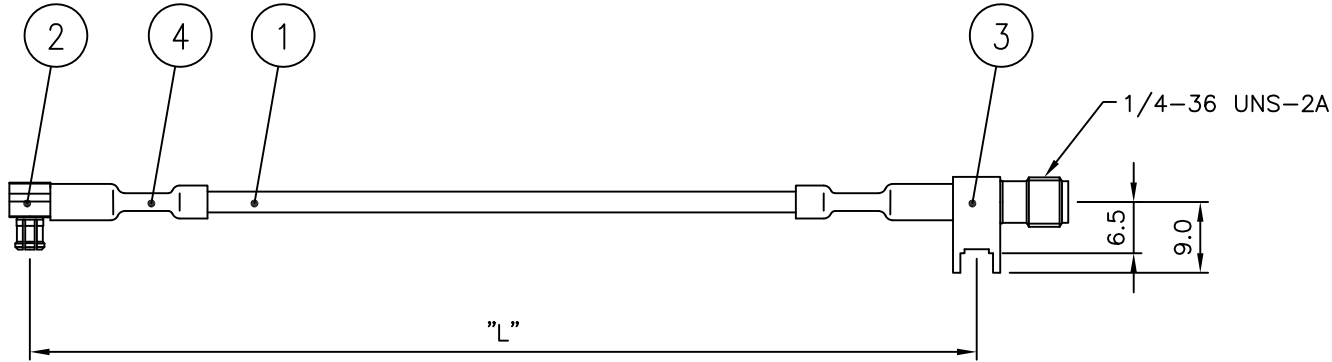

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm (Nominal)

2. FREQUENCY RANGE : DC~3GHz

3. VSWR (Max) : 1.2

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
- 2-2. MCX PL-----▶▶ BODY : Gold Plating
CONTACT : Gold Plating
COVER : Gold Plating
- 2-2. SMA JL-4R-----▶▶ BODY : Gold Plating
CONTACT : Gold Plating

	4	SHRINK TUBE	2	LS TUBE	ATU00358-N/1	Ø4-20mm Black	
	3	CONNECTOR	1	KJ COMTECH	CN01451-7/2	SMA50 JL-4R	
	2	CONNECTOR	1	KJ COMTECH	CN00034-7/2	MCX50 PL	
	1	COAXIAL CABLE		EXPENTEL	ACA00036-N/1	85FJ(50Ω) - CLEAR	
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2024. 05. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY			TITLE CABLE ASS'Y			
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.H.KIM		A4			
	CHECKED BY						
	SCALE	UNIT			DWG NO.		CF01738-7/1
	N/S	mm			DETAIL NO.		
				REVISION		I R	
				SHEET		1 of 1	