


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM	S.H.KIM	2024. 08. 22.

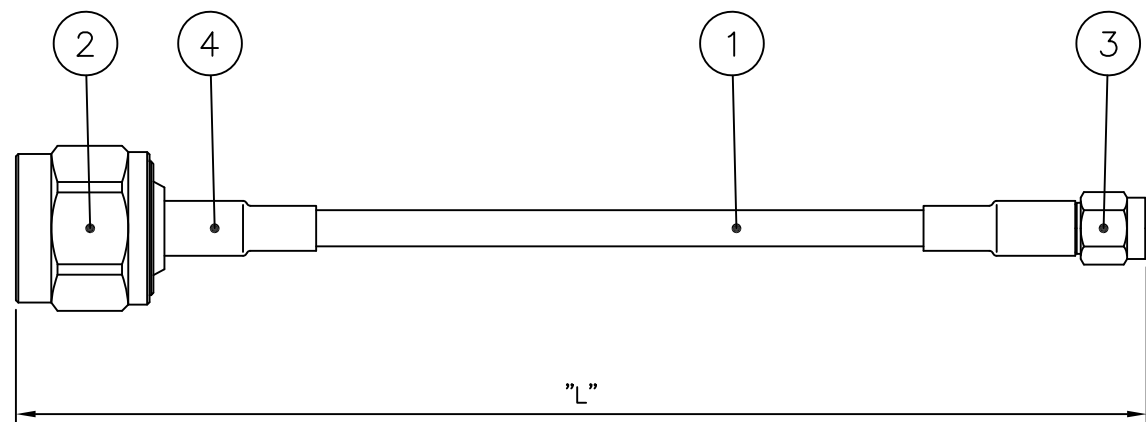


ELECTRICAL DATA


- 1. IMPEDANCE : 50ohm (Nominal)
- 2. Frequency Range : DC~8GHz
- 3. VSWR(Max) : 1.25

Notes

- 1. RoHS & Pb-FREE
- 2. CONNECTOR FINISHES
 - 2-1.N PS-----▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2.SMA PS-----▶▶BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
- 3. 디핑작업시 JACKET 달지 않게 작업 주의(변형발생)

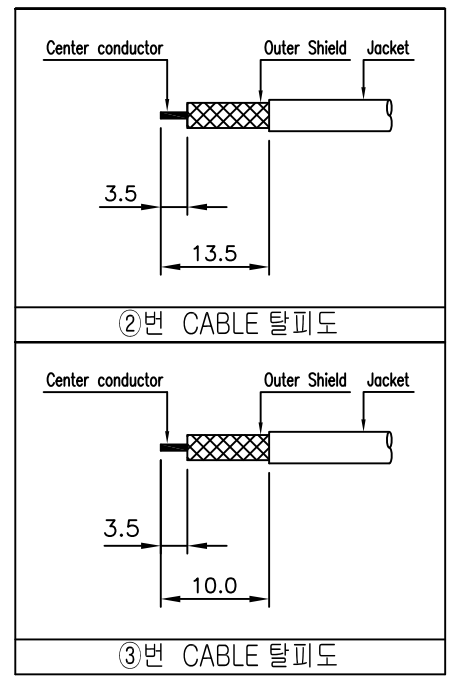

HEX5.7 FERRULE 압착시 절반만 할 것



4	SHRINK TUBE	2	LS TUBE	ATU00007-N/1	Ø8-20mm-BLACK
3	CONNECTOR	1	KJ COMTECH	CN02764-7/C	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN02758-7/B	N50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00517-N/1	141MFU (BLUE/-URETHANE)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
APPROVED BY		S.H.KIM			
CHECKED BY					
DRAWN BY		S.H.KIM			
CHECKED BY			TITLE CABLE ASS'Y		
SCALE		UNIT			
N/S		mm	A4		
					
			DWG NO.	CF01751-7/1	
			DETAIL NO.		
			REVISION	I R	SHEET 1 of 1