


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM	S.H.KIM	2024. 08. 22.

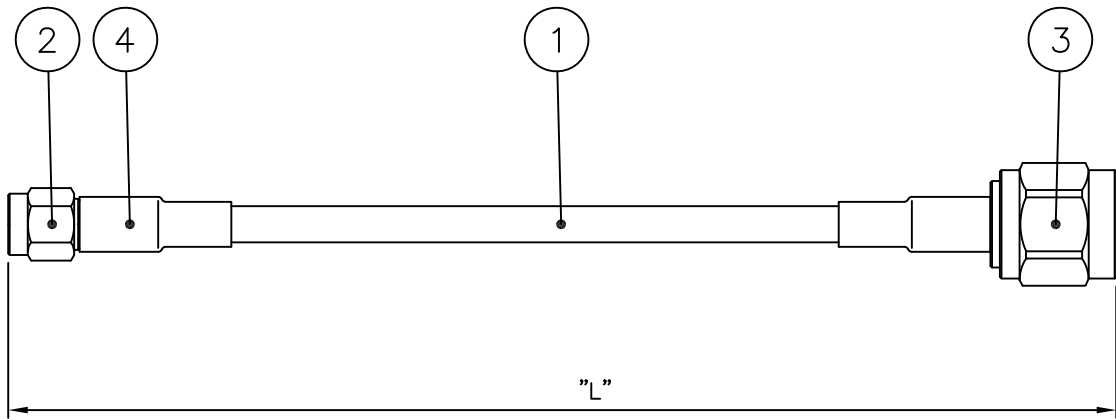


ELECTRICAL DATA


1. IMPEDANCE : 50ohm (Nominal)
2. Frequency Range : DC~4GHz
3. VSWR(Max) : 1.25

Notes


1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. SMA PS-----▶ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
2-2. TNC PS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
3. 디핑작업시 JACKET 달지 않게 작업 주의(변형발생)

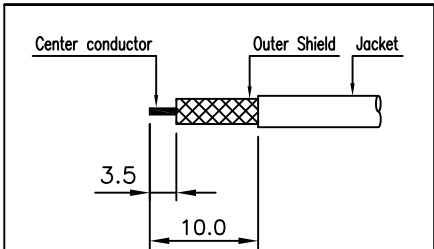

②번 CABLE 탈피도

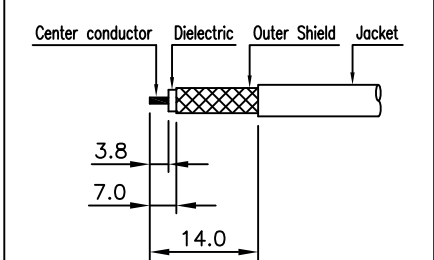

③번 CABLE 탈피도



CRIMP SIZE

HEX5.7 FERRULE 절반만 압착할 것

4	SHRINK TUBE	2	LS TUBE	ATU00007-N/1	Ø8-20mm-BLACK
3	CONNECTOR	1	KJ COMTECH	CN00369-7/9	TNC50 PS
2	CONNECTOR	1	KJ COMTECH	CN02764-7/C	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00517-N/1	141MFU (BLUE/-URETHANE)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
APPROVED BY		S.H.KIM			
CHECKED BY					
DRAWN BY		S.H.KIM			
CHECKED BY		TITLE CABLE ASS'Y			
SCALE		A4	DWG NO.	CF01752-7/1	
UNIT			DETAIL NO.		
N/S	mm		REVISION	I R	SHEET
					