


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM	S.H.KIM	2024. 08. 22.


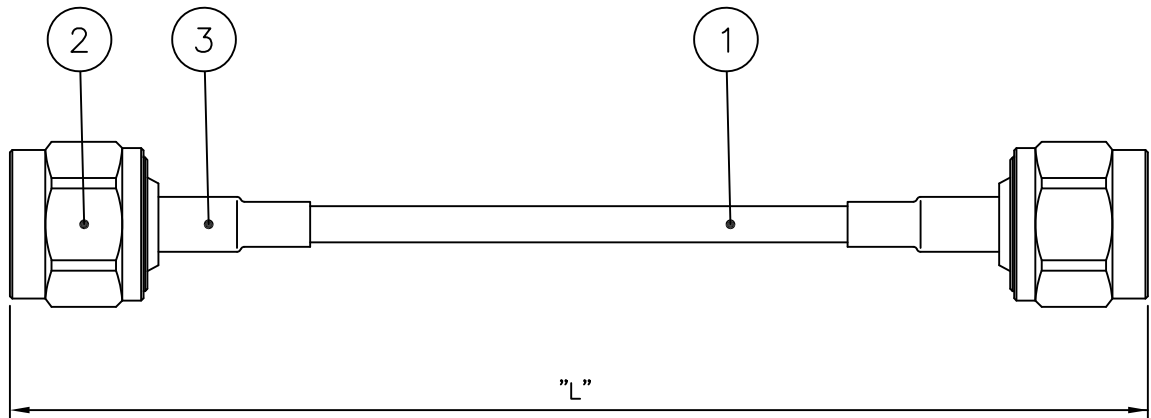


ELECTRICAL DATA

1. IMPEDANCE : 50ohm (Nominal)
2. Frequency Range : DC~8GHz
3. VSWR(Max) : 1.25

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1.N PS-----▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
3. 디핑작업시 JACKET 달지 않게 작업 주의(변형발생)

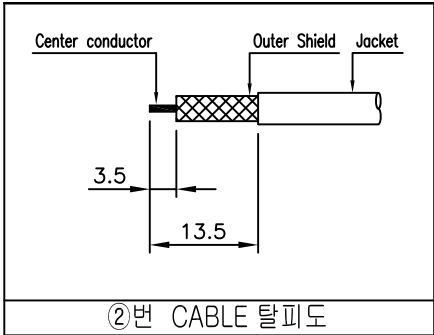

HEX5.7 FERRULE 절반만 압착할 것

	3	SHRINK TUBE	2	LS TUBE	ATU00007-N/1	Ø8-20mm-BLACK		
	2	CONNECTOR	2	KJ COMTECH	CN02758-7/B	N50 PS		
	1	COAXIAL CABLE		EXPANTEL	ACA00517-N/1	141MFU (BLUE/-URETHANE)		
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS		
	DATE			2024. 08. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	S.H.KIM		TITLE				
	CHECKED BY							
CABLE LENGTH TOLERANCE	DRAWN BY	S.H.KIM		CABLE ASS'Y				
	CHECKED BY							
	SCALE	UNIT			A4	DWG NO.	CF01753-7/1	
	N/S	mm				DETAIL NO.		
						REVISION	I R	SHEET