


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
I R	Initial Registration	S.H.KIM		2024. 09. 26.

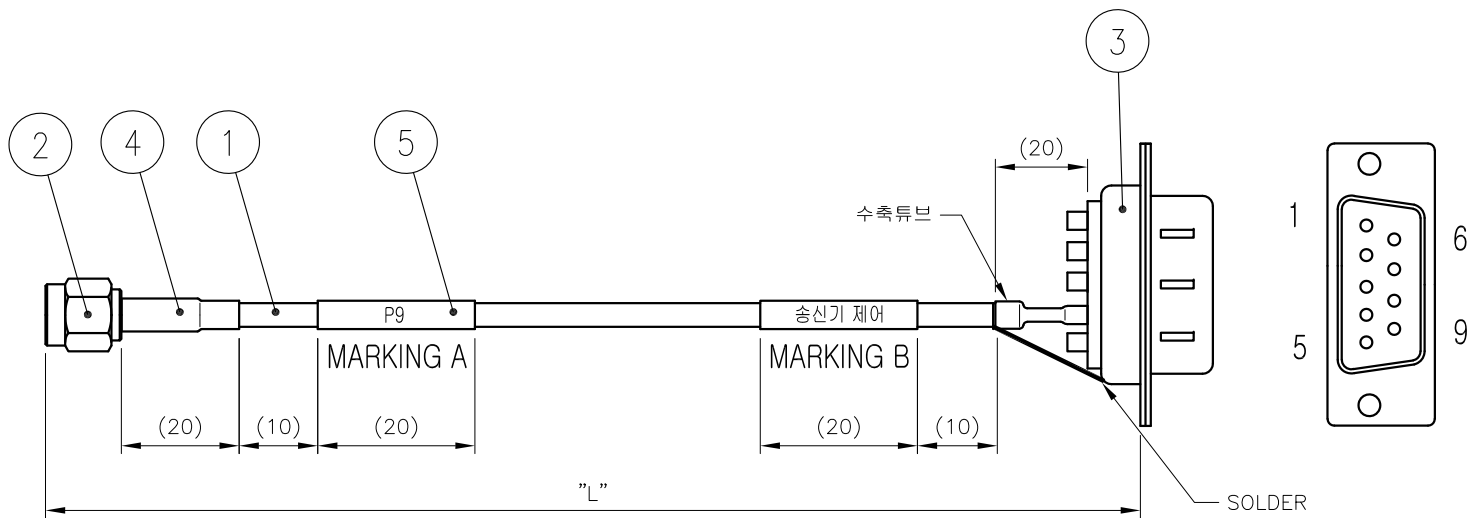

케이블 심선은 D-SUB 2번핀에 연결(수축튜브 처리), 케이블 편조선은 D-SUB 몸체에 납땜 연결

P9 송신기 제어

MARKING A MARKING B

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - SMA PS----▶▶BODY : Gold Plating
CONTACT : Gold Plating
COUPLING CAP : Nickel Plating

5	MARKING TUBE	2	LS TUBE	ATU00212-N/1	Ø4-40mm White
4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm Black
3	CONNECTOR	1	—	DCN00155-N/1	D-SUB 9P(M) SOLDER TYPE
2	CONNECTOR	1	KJ COMTECH	CN00962-7/1	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2024. 09. 26.		
CUSTOMER CODE			APPROVED BY		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			mm		
5000 ~ : +10%			N/S		
CUSTOMER			DATE		
DATE			2024. 09. 26.		
CUSTOMER CODE			APPROVED BY		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			mm		
5000 ~ : +10%			N/S		



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE		
CABLE ASS'Y		
A4	DWG NO.	CF01755-7/1
	DETAIL NO.	
	REVISION	I R
SHEET		1 of 1