


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			1994.04.05.
1	[설변처리No.201211-0005] BODY 납땜부 전장 길이 수정	I.C.KIM	I.C.KIM	2012.11.20.
2	[설변No.201712-0006] 조립성 개선으로 인한 JACK 낙시바늘 추가 및 절연체 형상변경	S.Y.EUN	I.C.KIM	2017.12.20.

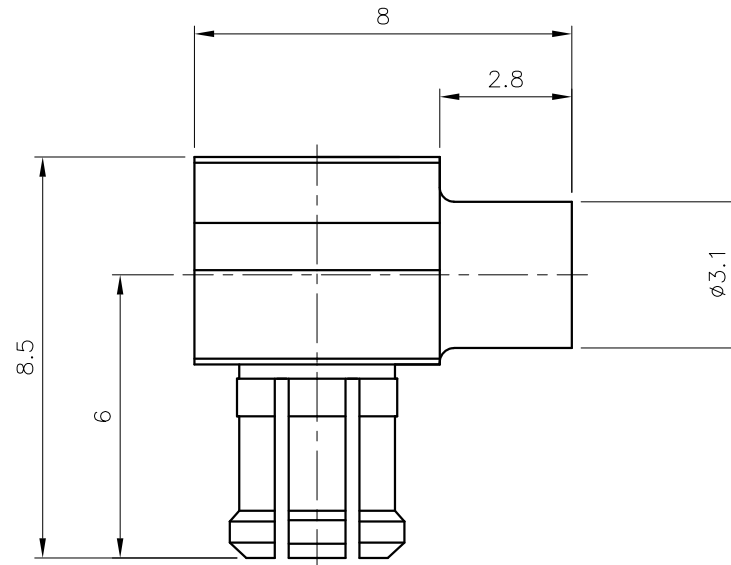

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 5.0m\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 1.0m\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -55°C ~ +125°C

2	5	COVER	1	MBsBD	Gold Plate	DCO00013-5/1	
	4	INSULATOR	1	TEFLON		DIN00933-N/1	
	3	INSULATOR	1	TEFLON		DIN02965-N/1 DIN00065-N/1	
2	2	CONTACT	1	MBsBD	Gold Plate	DCT00069-5/1	
	1	1-2	JACK BODY	1	BeCu	Gold Plate	DBB00326-5/1
1-1		BODY	1	MBsBD	DBD03204-1/1		
1	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal ±0.1	DATE 2017. 12. 20.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY I.C.KIM				
MATERIAL _____		CHECKED BY		TITLE MCX50 CABLE PL 85		
		DRAWN BY S.Y.EUN				
FINISH _____		SCALE 6/1	UNIT mm		A4	DWG NO. CN00034-7/2
						REVISION 2

