


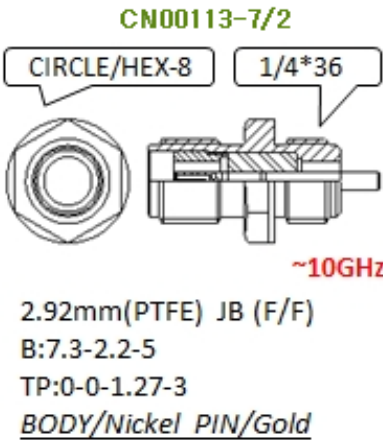

CN00113-7/2	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

■_2GHz	-	1.04	1.04	0.04
■_4GHz	-	1.02	1.01	0.08
■_6GHz	-	1.02	1.01	0.12
■_8GHz	-	1.03	1.03	0.17
■_10GHz	-	1.15	1.16	0.28

■_12GHz	-	1.26	1.27	0.53
■_14GHz	-	1.21	1.22	0.88
■_16GHz	-	1.15	1.18	1.12
■_18GHz	-	1.16	1.19	1.07

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male 50GHz Cable
- ☒ 2.4mm (J) to 2.92mm (P) AD00646-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

