



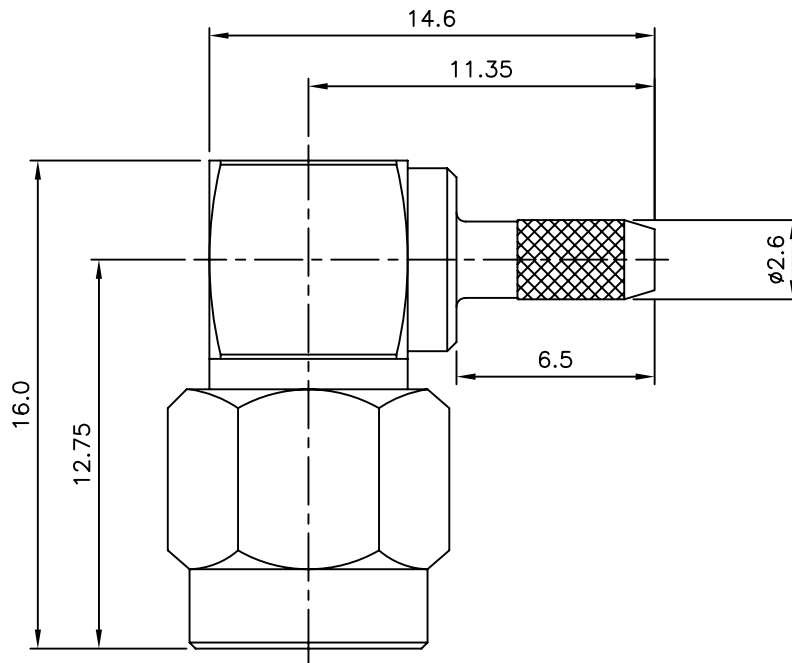

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Min)

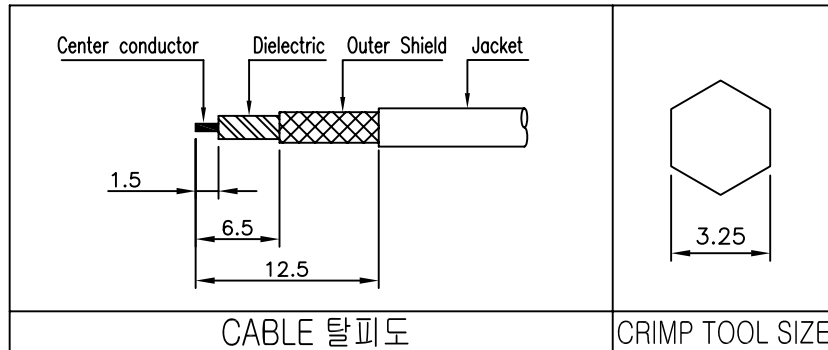

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	Y.H.CHO	2011.04.04.
1	[설번처리No.201307-0002] 원가철감 (BODY 은뱃 -> 억지끼움 조립 변경)	E.H.KIM	I.C.KIM	2013.07.09.
2	BODY 일체형 변경으로 인한 완제품 CODE 폐기 및 BODY 모따기 수정	C.K.KIM	I.C.KIM	2016.01.28.
3	커넥터 압착부 바디 부러짐 현상 방지로 인한 R추가	S.Y.EUN	I.C.KIM	2021.12.16.

8	SPRING RING	1	SUS	부동태 처리	DSR00002-5/1 (R2001)
7	COVER	1	MBsBD	Nickel Plate	DCO00026-5/1
6	COUPLING CAP	1	MBsBD	Nickel Plate	DCU00005-5/2 (K2011)
5	INSULATOR	1	TEFLON	White	DIN00090-N/1 (H2019)
4	GASKET	1	TEFLON	White	DGK00004-N/1 (G2001)
3	FERRULE	1	MBsBD	Nickel Plate	DFE00034-5/1
2	CONTACT	1	MBsBD	Gold Plate	DCT00300-5/1 (E2110)
1-2	원형 BODY	1	MBsBD	Nickel Plate	DBD01283-3/1 (D2109B)
1-1	사각 BODY	1	MBsBD	Nickel Plate	DBB00003-5/2 DBD00216-3/1 (D2109A)
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 12. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 CABLE PL RG316(50Ω)
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	4/1	DWG NO. CN00123-7/3 REVISION 3 SHEET 1 of 1
		UNIT	mm	