
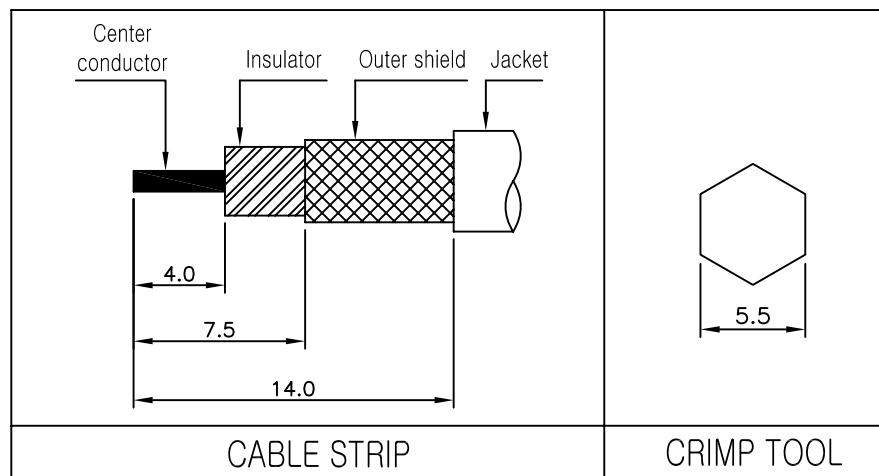


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	I.C.KIM	2015.11.23.
1	[설변처리No.201803-0008] 상대품 체결시 가스켓 누름현상 없음 -바디,캡 수정	S.Y.EUN	I.C.KIM	2018.03.16.

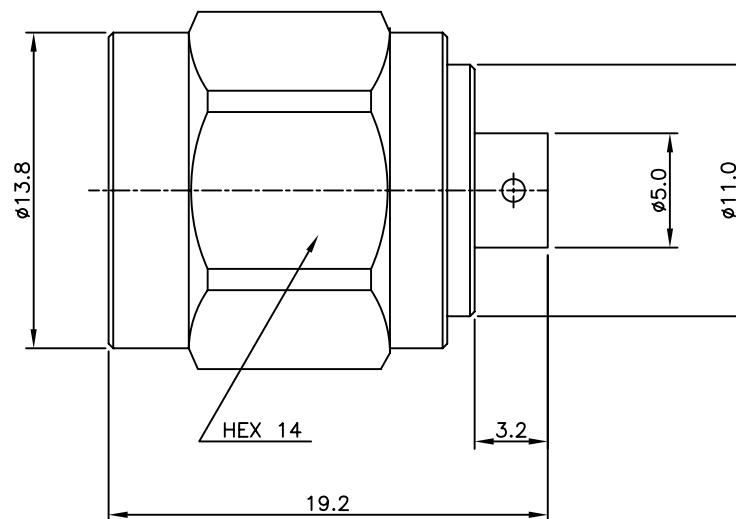

7	SPRING RING	1	SUS	Passivated	DSR00024-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00135-5/6 DCU00135-5/1
5	INSULATOR	1	TEFLON		DIN00528-N/1
4	GASKET	1	SILICONE RUB		DGK00008-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00162-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00571-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03312-5/6 DBD03312-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ± 0.1	DATE	2018. 03. 16.	
	Angle $\pm 1^\circ$	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		
FINISH	-	DRAWN BY	S.Y.EUN	
SCALE	3/1	UNIT	mm	



TITLE	
TNC50 CABLE PS 141MF(50Ω)	
DWG NO.	CN00369-7/3
REVISION	1
SHEET	1 of 1