
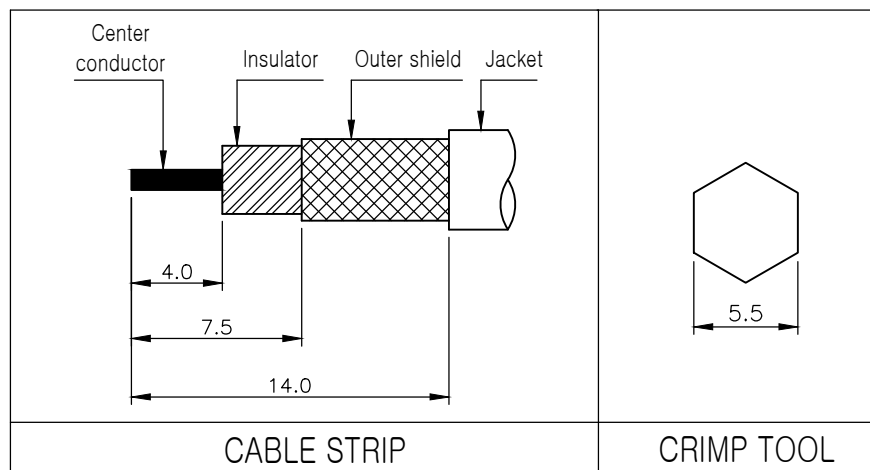



* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1/R	Initial Registration	I.C.KIM	I.C.KIM	2024.08.22.

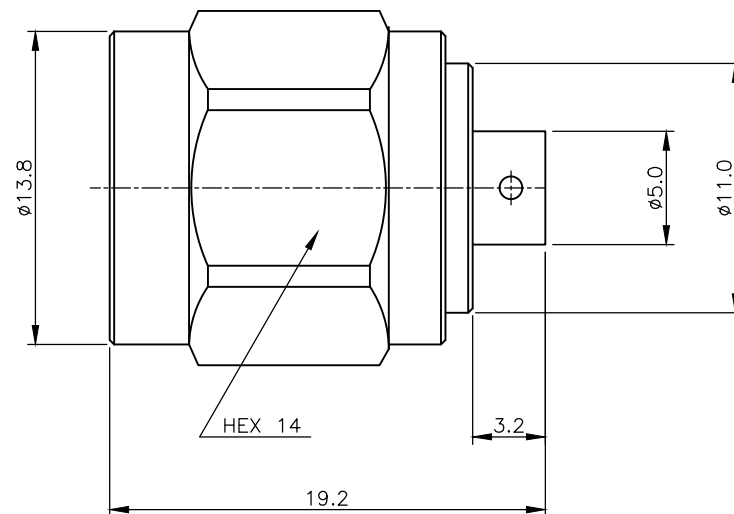

7	SPRING RING	1	SUS	Passivated	DSR00024-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00135-5/6
5	INSULATOR	1	TEFLON		DIN00528-N/1
4	GASKET	1	SILICONE RUB		DGK00008-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00163-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00571-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03312-5/6
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	± 0.1	2024. 08. 22.				
	Angle	APPROVED BY	I.C.KIM			
MATERIAL	$\pm 1^{\circ}$	CHECKED BY	TITLE			
-		DRAWN BY	TNC50 CABLE PS 141FJ(50 Ω)			
FINISH	-	SCALE	UNIT		A4	
		3/1	mm		DWG NO. CN00369-7/8	
				REVISION	1	SHEET 1 of 1