
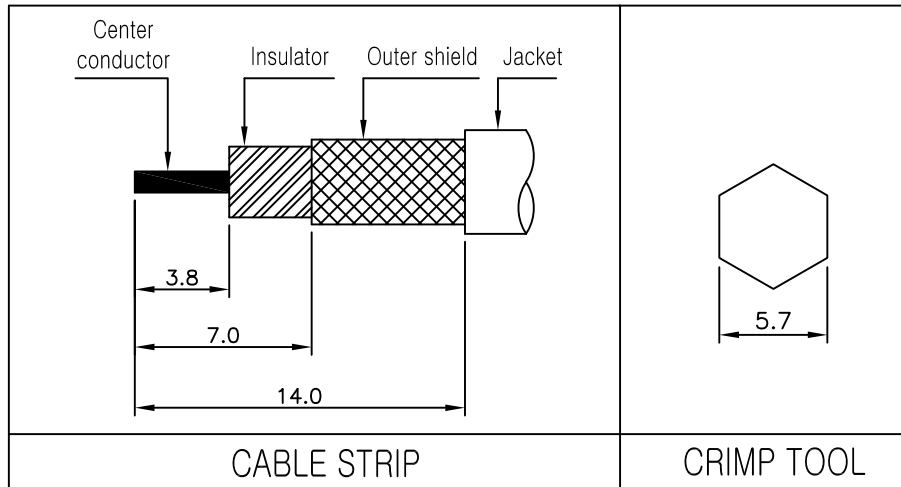


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	S.H.KIM		2024.09.02.

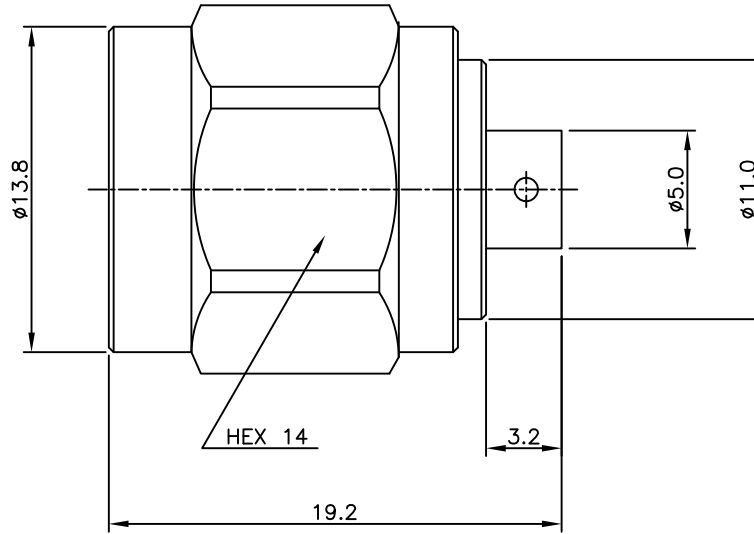

7	SPRING RING	1	SUS	Passivated	DSR00024-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00135-5/6
5	INSULATOR	1	TEFLON		DIN00528-N/1
4	GASKET	1	SILICONE RUB		DGK00008-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00123-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00571-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03312-5/6
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2024. 09. 02.			 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY					
MATERIAL -		CHECKED BY			TITLE TNC50 CABLE PS 141MFU(50Ω)		
		DRAWN BY S.H.KIM					
FINISH -		SCALE 3/1	UNIT mm		A4	DWG NO. CN00369-7/9	
						REVISION	